



## LRLD35: 3.5" P-SERIES

ROUND APERTURE FLANGED 600LM-3000LM (7W-30W)

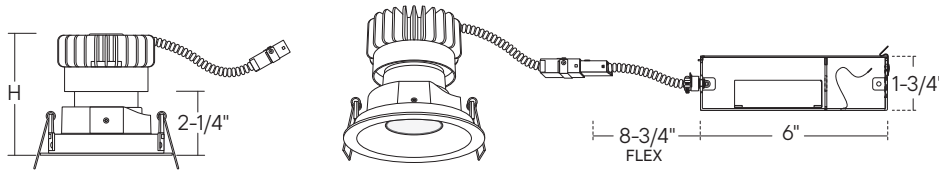

Ceiling Cut-Out: 3-7/8" Max  
 Ceiling Thickness: 1-1/4" Max

SKU	Height (H)	Lumens
-L06/-L10/-L15/-L20	4-1/8"	600lm - 2000lm
-L26/-L30	5-1/4"	2600lm - 3000lm

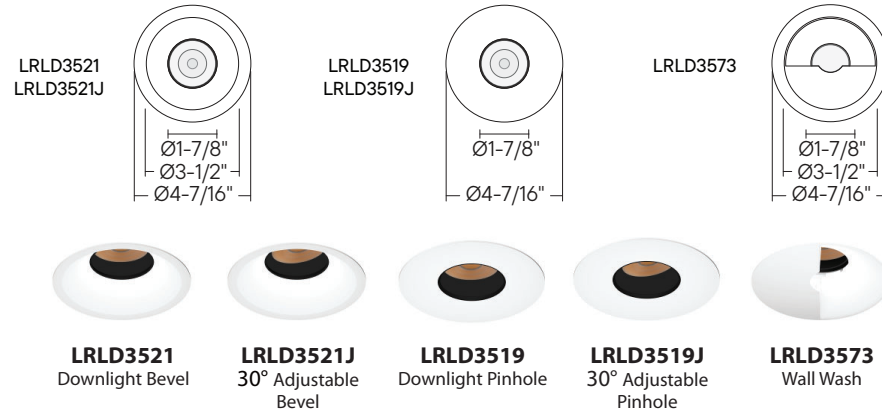

- Up to 30W, 3000lm
- Common color temps supported and Dim to Warm or RGBW options—a wide variety of beam options from Spot through Flood
- One Piece Die-Cast Construction
- Larger Aperture for Easy Installation
- Airtight Lens Wet Location Option
- New Construction, Type IC, and Fire-Rated Housings are available, wattage limitations may apply
- Multiple Wireless Control Options

[Click for Full Specification Details](#)

Trim	Trim Finish	Lumens	Beam Spread	Color Temperature	Control	Rating	Accessories	
<b>Trim Style</b>			<b>Beam Spread</b>		<b>Control</b>		<b>Rating</b>	
<b>FLANGED</b>			Wall Wash only	<b>Blank<sup>4</sup></b>	TRIAC/ELV Dimming (120V)	<b>-DIN</b>	None	<b>Blank</b>
Downlight Bevel	<b>LRLD3521</b>	15° Beam	<b>-B15</b>		0-10V Dimming (120V/277V)	<b>UE-D10</b>	Airtight Lensed (Wet Location)	<b>-WL</b>
Adjustable Bevel	<b>LRLD3521J</b>	24° Beam	<b>-B24</b>		1%, 0-10V Dimming (120V/277V)	<b>UE-D10P1</b>	4" J-Box (Chicago Plenum)	<b>-JB-CHP</b>
Downlight Pinhole	<b>LRLD3519</b>	36° Beam	<b>-B36</b>		UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	<b>UE-DUN</b>		
Adjustable Pinhole	<b>LRLD3519J</b>	50° Beam	<b>-B50</b>		Lutron EcoSystem	<b>DEC<sup>1</sup></b>		<b>Blank</b>
Wall Wash	<b>LRLD3573</b>				Dali Dimming	<b>-DLI<sup>1</sup></b>		<b>-LVR</b>
					Athena Wireless Node (120V)	<b>-AWN</b>		<b>/L39</b>
					UniSense (120V)	<b>-SUN-RMT<sup>3</sup></b>		<b>/L40</b>
					UniSense (120V/277V)	<b>-SUN-RMT-1227<sup>3</sup></b>		<b>/L41</b>
					Casambi Wireless Dimming (120V/277V)	<b>-DCSM<sup>1</sup></b>		<b>/L42</b>
					BubblyNet Wireless System (120V/277V)	<b>-DBNT<sup>1</sup></b>		<b>/L43</b>
								<b>/L44</b>
								<b>/L46</b>
								<b>/L49</b>
								<b>/L50UV</b>
								<b>/L53</b>
								<b>/L55</b>
<b>Trim Finish</b>			<b>Color Temperature</b>				<b>Accessories<sup>7,8</sup></b>	
All Black	<b>B</b>	2400K (90 CRI)	<b>-T24</b>				None	<b>Blank</b>
All White	<b>W</b>	2700K (90 CRI)	<b>-T27</b>				Black Hex-Cell Louver	<b>-LVR</b>
Custom Color	<b>CC</b>	2700K (97 CRI)	<b>-T27-C97</b>				Red Lens	<b>/L39</b>
		3000K (90 CRI)	<b>-T30</b>				Yellow Lens	<b>/L40</b>
		3000K (97 CRI)	<b>-T30-C97</b>				BlueRed Lens	<b>/L41</b>
		3500K (90 CRI)	<b>-T35</b>				Amber Lens	<b>/L42</b>
		4000K (90 CRI)	<b>-T40</b>				Green Lens	<b>/L43</b>
		Dim-to-Warm	<b>-TWD<sup>2</sup></b>				Daylight Blue Lens	<b>/L44</b>
		1800K-3000K					Violet Blue Lens	<b>/L46</b>
		RGB+W Control (24VDC)	<b>-RGBWV24<sup>1,5,6</sup></b>				Frosted Soft Focus	<b>/L49</b>
<b>Lumens</b>							Ultra Violet Filter	<b>/L50UV</b>
600lm (7W)	<b>-L06</b>						Micro Prismatic Spread Lens	<b>/L53</b>
1000lm (11W)	<b>-L10</b>						Linear Spread Lens	<b>/L55</b>
1500lm (15W)	<b>-L15</b>							
2000lm (21W)	<b>-L20</b>							
2600lm (25W)	<b>-L26</b>							
3000lm (30W)	<b>-L30</b>							

<sup>1</sup> Special order, minimum order. Extended lead time may apply. Consult Factory.  
<sup>2</sup> (-TWD) is only compatible with (-L15) 1500lm (15W).  
<sup>3</sup> (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.  
<sup>4</sup> Must be selected for Wallwash Trim Style.  
<sup>5</sup> Remote Power Supplies and Control Gear required. Consult Factory for details.  
<sup>6</sup> (-RGBWV24) only available with (-L20).  
<sup>7</sup> Not available with Wall Wash Trim (LRLD3573).  
<sup>8</sup> Accessories may not be combined. Limit is one (1) accessory per fixture.

Consult factory for emergency battery options.