



## LRLDQ2573: 2.5" P-SERIES

RECESSED LED - ZERODARK WALL WASH, SQUARE FLANGED, 750LM/1200LM

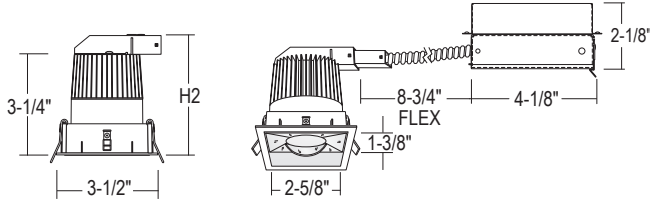

**-L09:** H2: 3-7/8"  
**-L14:** H2: 5-1/8"

Ceiling Cut-Out: 3-1/4" Max  
 Ceiling Thickness (Frameless): 1" Max  
 Ceiling Thickness (with Frame): 3/4" Max



- Equivalent to 75W MR16 Output
- Ideal where space is limited and energy savings is important
- 750lm (15W) and 1200lm (22W)
- 90 CRI Standard
- 0.5% dimming for 750lm (-L09), 5% dimming for 1200lm (-L14).

[Click for Full Specification Details](#)

Fixture	Reflector Finish	Flange Ring Finish	Lumens	Color Temperature	Control	Rating	Optional Frames
<b>Fixture</b>	<b>LRLDQ2573</b>		<b>Lumens (Nominal Delivered)</b>		<b>Control</b>	<b>Rating</b>	
ZeroDark			750lm (15W) <b>-L09<sup>2</sup></b>		Triac Dimming (120V)	<b>Blank</b>	None <b>Blank</b>
Wall Wash			1200lm (22W) <b>-L14<sup>5</sup></b>		0-10V Dimming (120V/277V)	<b>UE-D10</b>	Airtight Lensed (Wet Location) <b>-WL</b>
Square Flanged					UniDim™ 0-10V, ELV, Triac Dimming (120V/277V)	<b>UE-DUN</b>	4" Jbox (Chicago Plenum) <b>-JB-CHP</b>
			<b>Color Temperature</b>		0-10V 1% Dimming (120V/277V)	<b>UE-D10P1</b>	
<b>Reflector Finish<sup>7</sup></b>			3000K (90 CRI) <b>Blank</b>		Lutron EcoSystem Dimming (1%)	<b>-DEC<sup>8</sup></b>	
Matte White <b>W</b>			3000K (97 CRI) <b>-C97</b>		DALI Dimming	<b>-DLI<sup>8</sup></b>	
Black <b>B</b>			2700K (90 CRI) <b>-T27</b>		Athena Wireless Node (120V)	<b>-AWN</b>	
Satin Haze <b>S</b>			2700K (97 CRI) <b>-T27-C97</b>		Athena Wireless Node	<b>-AWN-OCC</b>	
<b>Flange Ring Finish</b>			3500K (90 CRI) <b>-T35</b>		Occupancy Sensor (120V)	<b>-SUN-RMT<sup>3</sup></b>	
White <b>W</b>			4000K (90 CRI) <b>-T40</b>		UniSense - Remotely Mounted Motion/Photosensor (120V)	<b>-SUN-RMT-1227<sup>3</sup></b>	
Black <b>B</b>			3000K - 1800K Warm Dimming <b>-TWD<sup>2,5</sup></b>		UniSense - Remotely Mounted Motion/Photosensor		
					Casambi Wireless Dimming	<b>-DCSM<sup>8</sup></b>	
					BubblyNet Wireless System	<b>-DBNT<sup>8</sup></b>	

<sup>2</sup> (-TWD) Warm Dimming only available for 1000lm (-L09) lumen package.  
<sup>3</sup> (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.  
<sup>5</sup> (-TWD) Warm Dimming, and (-L14) 1400lm is not available for both LHLD25IC- FRM (IC) or LHFRD25 (Fire-Rated).  
<sup>7</sup> Reflector interior finish is standard black with reflector face finish in Matte White (W), Specular Black (B), and Satin Haze (S).  
<sup>8</sup> Special order, minimum order. Extended lead time may apply. Consult Factory.

Consult factory for emergency battery options.

**NOTE:** For commercial applications with 1/2" Pipe or Flex-Conduit (LITON# PCT031) Fitting Adaptor should be used. Consult Factory.