



LRLDQ35: 3.5" P-SERIES



SQUARE APERTURE FLANGED 600LM-3000LM (7W-30W)

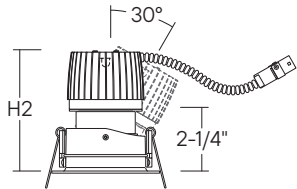

-L06, -L10 -L26, -L30
 -L15, -L20 H2: 5-1/4"
 H2: 4-1/8"

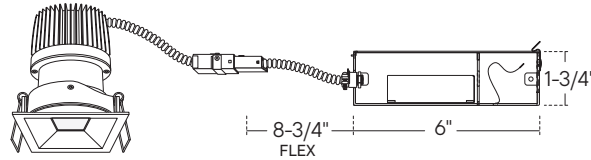

Ceiling Cut-Out: 3-7/8" Max
 Ceiling Thickness: 1-1/4" Max

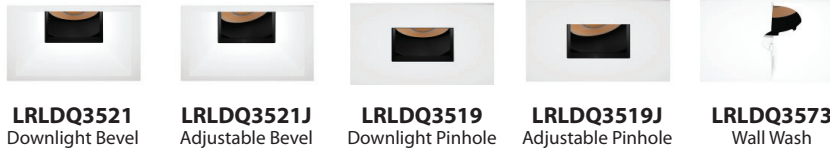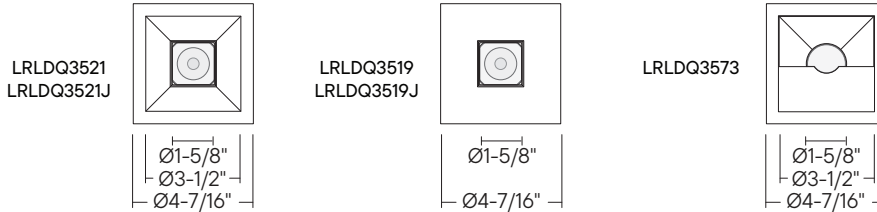

- Up to 30W, 3000lm
- Multiple Beam Spreads and Color Temperatures including Dim to Warm
- One Piece Die-Cast Construction
- Larger Aperture for Easy Installation
- Airtight Lens Wet Location Option
- Type IC Option Available
- Multiple Wireless Control Options

[Click for Full Specification Details](#)

Trim	Trim Finish	Lumens	Beam Spread	Color Temperature	Control	Rating	Accessories
Trim Style			Beam Spread		Control	Rating	
	FLANGED		Wall Wash only Blank⁴		TRIAC/ELV Dimming (120V)	-DIN	None Blank
Downlight Bevel	LRLDQ3521		15° Beam -B15		0-10V Dimming (120V/277V)	UE-D10	Airtight Lensed (Wet Location)
Adjustable Bevel	LRLDQ3521J		24° Beam -B24		1%, 0-10V Dimming (120V/277V)	UE-D10P1	4" J-Box (Chicago Plenum)
Downlight Pinhole	LRLDQ3519		36° Beam -B36		UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	UE-DUN	
Adjustable Pinhole	LRLDQ3519J		50° Beam -B50		Lutron EcoSystem		Accessories
Wall Wash	LRLDQ3573				Dali Dimming		None Blank
					Athena Wireless Node (120V)		Black Hex-Cell Louver -LVR
Trim Finish			Color Temperature		UniSense (120V)		Red Lens /L39⁷
All Black	B		2400K (90 CRI) -T24		UniSense (120V/277V)		Yellow Lens /L40⁷
All White	W		2700K (90 CRI) -T27		Casambi Wireless Dimming (120V/277V)		BlueRed Lens /L41⁷
Custom Color	CC		2700K (97 CRI) -T27-C97		BubbllyNet Wireless System (120V/277V)		Amber Lens /L42⁷
			3000K (90 CRI) -T30				Green Lens /L43⁷
Lumens			3000K (97 CRI) -T30-C97				Daylight Blue Lens /L44⁷
600lm (7W)	-L06		3500K (90 CRI) -T35				Violet Blue Lens /L46⁷
1000lm (11W)	-L10		4000K (90 CRI) -T40				Frosted Soft Focus /L49⁷
1500lm (15W)	-L15		Dim-to-Warm -TWD²				Ultra Violet Filter /L50UV⁷
2000lm (21W)	-L20		1800K-3000K				Micro Prismatic Spread Lens /L53⁷
2600lm (25W)	-L26		RGB+W Control -RGBWV24^{1,5,6}				Linear Spread Lens /L55⁷
3000lm (30W)	-L30						

¹ Special order, minimum order. Extended lead time may apply. Consult Factory.
² (-TWD) is only compatible with (-L15) 1500lm (15W).
³ (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.
⁴ Must be selected for Wallwash Trim Style.
⁵ Remote Power Supplies and Control Gear required. Consult Factory for details.
⁶ (-RGBWV24) only available with (-L20).
⁷ Not available with Wall Wash Trim (LRLDQ3573).

Consult factory for emergency battery options.

2026.02.04