



LRXLD2567: 2.5" P-SERIES

RECESSED LED - ADJUSTABLE PULL DOWN, ROUND FLANGELESS, 550LM (7W)



Ceiling Cut-Out: 3-1/16" Max
Ceiling Thickness (Frameless): Any
Ceiling Thickness (with Frame): Any

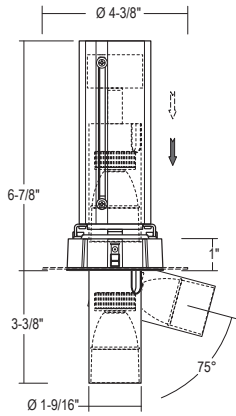

- Tilts 75° with 360° rotation
- White or Black cylinder and reflector finishes
- 120V triac dimming standard

 [Click for Full Specification Details](#)

Fixture	Cylinder & Reflector Finish	Beam Spread	Color Temperature	Control	Optional Frames
Fixture		Beam Spread		Control	
Adjustable	LRXLD2567	20° Spot	-B20	Triac Dimming (120V)	Blank
Pull Down		40° Flood	-B40	0-10V Dimming (1%) (120V/277V)	UE-D10P1
Round Flangeless		75° Very Wide Flood	-B75	Athena Wireless Node (120V)	-AWN
				Athena Wireless Node	-AWN-OCC
				Occupancy Sensor (120V)	-SUN-RMT²
				UniSense - Remotely Mounted Motion/Photosensor (120V)	-SUN-RMT-1227²
				UniSense - Remotely Mounted Motion/Photosensor	
				Casambi Wireless Dimming	-DCSM¹
				BubblyNet Wireless System	-DBNT¹
Cylinder & Reflector Finish		Color Temperature			
White	W	2700K (90 CRI)	-T27		
Black	B	3000K (90 CRI)	-T30		
		3500K (90 CRI)	-T35		

¹ Special Order

² (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.

NOTES: Consult factory for emergency battery options.

For commercial applications with 1/2" Pipe or Flex-Conduit (**LITON# PCT031**) Fitting Adaptor should be used. Consult Factory. LRXLD2567 and LHLD25-FRM for (-L14) 1200lm is available with LFB2012 for Fire-Rated Application.