


## LRXLD35: 3.5" P-SERIES

ROUND APERTURE TRIMLESS 600LM-3000LM (7W-30W)

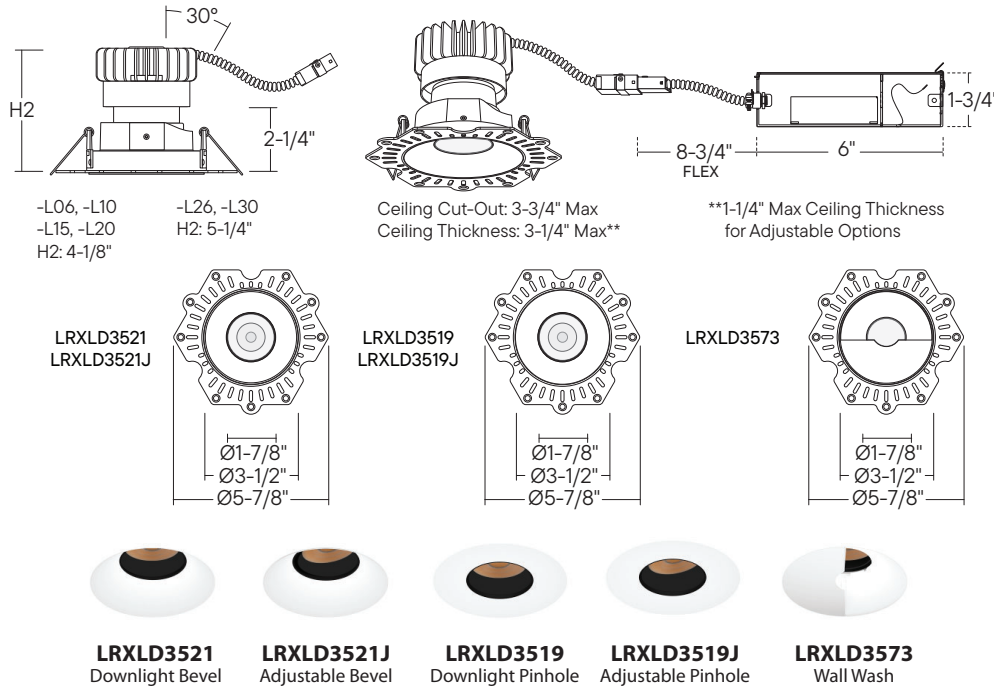

- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 

- Up to 30W, 3000lm
- Multiple Beam Spreads and Color Temperatures including Dim to Warm
- One Piece Die-Cast Construction
- Larger Aperture for Easy Installation
- Airtight Lens Wet Location Option
- Type IC Option Available
- Multiple Wireless Control Options
- Wood Installation Available

[Click for Full Specification Details](#)

Trim	Reflector Insert Finish	Lumens	Beam Spread	Color Temperature	Control	Rating	Accessories	
<b>Trim Style</b>			<b>Beam Spread</b>		<b>Control</b>		<b>Rating</b>	
TRIMLESS			Wall Wash only	<b>Blank<sup>4</sup></b>	ELV and Triac Dimming (120V)	<b>-DIN</b>	None	<b>Blank</b>
Downlight Bevel	<b>LRXLD3521</b>		15° Beam	<b>-B15</b>	0-10V Dimming (120V/277V)	<b>UE-D10</b>	Airtight Lensed (Wet Location)	<b>-WL</b>
Adjustable Bevel	<b>LRXLD3521J</b>		24° Beam	<b>-B24</b>	0-10V 1% Dimming (120V/277V)	<b>UE-D10P1</b>	Wood Installation	<b>-WD<sup>7</sup></b>
Downlight Pinhole	<b>LRXLD3519</b>		36° Beam	<b>-B36</b>	UniDim™ 0-10V, ELV, and Triac Dimming (120V/277V)	<b>UE-DUN</b>	4" J-Box (Chicago Plenum)	<b>-JB-CHP</b>
Adjustable Pinhole	<b>LRXLD3519J</b>		50° Beam	<b>-B50</b>	Lutron EcoSystem	<b>DEC<sup>1</sup></b>		
Wall Wash	<b>LRXLD3573</b>				DALI Dimming	<b>-DLI<sup>1</sup></b>		
					Athena Wireless Node (120V)	<b>-AWN</b>		
<b>Reflector Insert Finish</b>			<b>Color Temperature</b>		Athena Wireless Node (120V)	<b>-AWN-OCC</b>	<b>Accessories</b>	
All Black	<b>B</b>		2700K (90 CRI)	<b>-T27</b>	Occupancy Sensor (120V)	<b>-SUN-RMT<sup>3</sup></b>	None	<b>Blank</b>
All White	<b>W</b>		2700K (97 CRI)	<b>-T27-C97</b>	UniSense (120V)	<b>-SUN-RMT-1227<sup>4</sup></b>	Black Hex-Cell Louver	<b>-LVR</b>
Custom Color	<b>CC</b>		3000K (90 CRI)	<b>-T30</b>	UniSense (120V/277V)	<b>-DCSM<sup>1</sup></b>	Red Lens	<b>/L39<sup>8</sup></b>
			3000K (97 CRI)	<b>-T30-C97</b>	Casambi Wireless Dimming (120V/277V)	<b>-DBNT<sup>1</sup></b>	Yellow Lens	<b>/L40<sup>8</sup></b>
<b>Lumens</b>			3500K (90 CRI)	<b>-T35</b>	BubblyNet Wireless System (120V/277V)		BlueRed Lens	<b>/L41<sup>8</sup></b>
600lm (7W)	<b>-L06</b>		4000K (90 CRI)	<b>-T40</b>			Amber Lens	<b>/L42<sup>8</sup></b>
1000lm (11W)	<b>-L10</b>		Dim-to-Warm	<b>-TWD<sup>2</sup></b>			Green Lens	<b>/L43<sup>8</sup></b>
1500lm (15W)	<b>-L15</b>		1800K-3000K				Daylight Blue Lens	<b>/L44<sup>8</sup></b>
2000lm (21W)	<b>-L20</b>		RGB+W Control (24VDC)	<b>-RGBWV24<sup>1,5,6</sup></b>			Violet Blue Lens	<b>/L46<sup>8</sup></b>
2600lm (25W)	<b>-L26</b>						Frosted Soft Focus	<b>/L49<sup>8</sup></b>
3000lm (30W)	<b>-L30</b>						Ultra Violet Filter	<b>/L50UV<sup>8</sup></b>
							Micro Prismatic Spread Lens	<b>/L53<sup>8</sup></b>
							Linear Spread Lens	<b>/L55<sup>8</sup></b>

2026.02.04