



## LRXLDQ2573: 2.5" P·SERIES

RECESSED LED - ZERODARK WALL WASH, SQUARE FLANGELESS, 750LM/1200LM

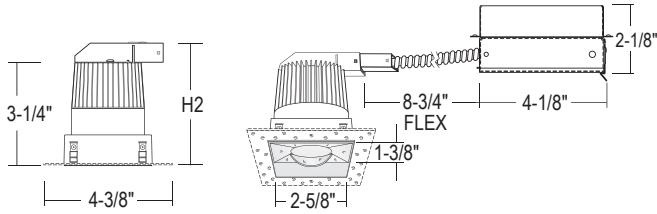

**-L09:** H2: 3-7/8"    **-L14:** H2: 5-1/8"    Ceiling Cut-Out: 2-7/8" Max  
 Ceiling Thickness: 3-00" Max



- Equivalent to 75W MR16 Output
- Ideal where space is limited and energy savings is important
- 750lm (15W) and 1200lm (22W)
- 90 CRI Standard
- 0.5% dimming for 750lm (-L09), 5% dimming for 1200lm (-L14).

[Click for Full Specification Details](#)

Trim Style	Reflector Finish	Lumens	Color Temperature	Control	Rating	Optional Frames
<b>Trim Style</b>		<b>Color Temperature</b>		<b>Control</b>		<b>Rating</b>
ZeroDark Spot/Wall Wash Square Flangeless	<b>LRXLDQ2573</b>	3000K (90 CRI)	<b>Blank</b>	Triac Dimming (120V)	<b>Blank</b>	None
		3000K (97 CRI)	<b>-C97</b>	0-10V Dimming (120V/277V)	<b>UE-D10</b>	4" Jbox (Chicago Plenum)
		2700K (90 CRI)	<b>-T27</b>	UniDim™ 0-10V, ELV, Triac Dimming (120V/277V)	<b>UE-DUN</b>	
		2700K (97 CRI)	<b>-T27-C97</b>	0-10V 1% Dimming (120V/277V)	<b>UE-D10P1</b>	
<b>Reflector Finish<sup>7</sup></b>		3500K (90 CRI)	<b>-T35</b>	Lutron EcoSystem Dimming (1%)	<b>-DEC<sup>8</sup></b>	
Matte White	<b>W</b>	4000K (90 CRI)	<b>-T40</b>	DALI Dimming	<b>-DLI<sup>8</sup></b>	
Black	<b>B</b>	3000K - 1800K Warm Dimming	<b>-TWD<sup>2,5</sup></b>	Athena Wireless Node (120V)	<b>-AWN</b>	
Satin Haze	<b>S</b>			Athena Wireless Node Occupancy Sensor (120V)	<b>-AWN-OCC</b>	
<b>Lumens (Nominal Delivered)</b>				UniSense - Remotely Mounted Motion/Photosensor (120V)	<b>-SUN-RMT<sup>3</sup></b>	
750lm (15W)	<b>-L09<sup>2</sup></b>			UniSense - Remotely Mounted Motion/Photosensor	<b>-SUN-RMT-1227<sup>3</sup></b>	
1200lm (22W)	<b>-L14<sup>5</sup></b>			Casambi Wireless Dimming	<b>-DCSM<sup>8</sup></b>	
				BubblyNet Wireless System	<b>-DBNT<sup>8</sup></b>	

2025.08.01

<sup>2</sup> (-TWD) Warm Dimming only available for 1000lm (-L09) lumen package.  
<sup>3</sup> (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.  
<sup>5</sup> (-TWD) Warm Dimming, and (-L14) 1400lm is not available for both LHQLD251C- FRM (IC) or LHFRLD25 (Fire-Rated).  
<sup>7</sup> Reflector interior finish is standard black with reflector face finish in Matte White (W), Specular Black (B), and Satin Haze (S).  
<sup>8</sup> Special order, minimum order. Extended lead time may apply. Consult Factory.  
 Consult factory for emergency battery options.

**NOTE:** For commercial applications with 1/2" Pipe or Flex-Conduit (**LITON# PCT031**) Fitting Adaptor should be used. Consult Factory.  
 LRXLDQ2573 AND LHQLD25-FRM for (-L14) 1200lm is available with LFB2012 for Fire-Rated Application.