



LRXLDQ35: 3.5" P-SERIES

SQUARE APERTURE TRIMLESS 600LM-3000LM (7W-30W)

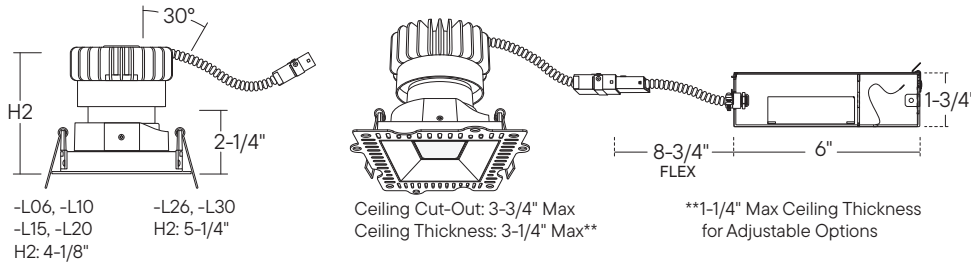

-L06, -L10
-L15, -L20
H2: 4-1/8"
-L26, -L30
H2: 5-1/4"

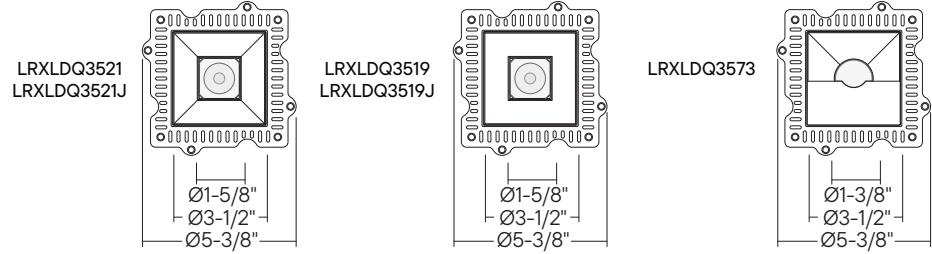

Intertek
IC Rated
U.S. Assembled
Wet
Ambient Light
Downlight
Adjustable
Sloped Ceiling
Daylight Sensor
Motion/Daylight Sensor
Quickship
120V
277V
RGB+W

- Up to 30W, 3000lm
- Multiple Beam Spreads and Color Temperatures including Dim to Warm
- One Piece Die-Cast Construction
- Larger Aperture for Easy Installation
- Airtight Lens Wet Location Option
- Type IC Option Available
- Multiple Wireless Control Options
- Wood Installation Available

[Click for Full Specification Details](#)

Trim	Reflector Insert Finish	Lumens	Beam Spread	Color Temperature	Control	Rating	Accessories	
Trim Style			Beam Spread		Control	Rating		
	TRIMLESS		Wall Wash only	Blank⁴	ELV and Triac Dimming (120V)	-DIN	None	Blank
Downlight Bevel	LRXLDQ3521	15° Beam		-B15	0-10V Dimming (120V/277V)	UE-D10	Airtight Lensed (Wet Location)	-WL
Adjustable Bevel	LRXLDQ3521J	24° Beam		-B24	0-10V 1% Dimming (120V/277V)	UE-D10P1	Wood Installation	-WD⁷
Downlight Pinhole	LRXLDQ3519	36° Beam		-B36	UniDim™ 0-10V, ELV, and Triac Dimming (120V/277V)	UE-DUN	4" J-Box (Chicago Plenum)	-JB-CHP
Adjustable Pinhole	LRXLDQ3519J	50° Beam		-B50	Lutron EcoSystem DALI Dimming		Accessories	
Wall Wash	LRXLDQ3573				Athena Wireless Node (120V)		None	Blank
					Athena Wireless Node Occupancy Sensor (120V)		Black Hex-Cell Louver	-LVR
Reflector Insert Finish			Color Temperature		UniSense (120V)		Red Lens	/L39⁸
All Black	B	2700K (90 CRI)	-T27		UniSense (120V/277V)		Yellow Lens	/L40⁸
All White	W	2700K (97 CRI)	-T27-C97		Casambi Wireless Dimming (120V/277V)		BlueRed Lens	/L41⁸
Custom Color	CC	3000K (90 CRI)	-T30		BubblyNet Wireless System (120V/277V)		Amber Lens	/L42⁸
		3000K (97 CRI)	-T30-C97				Green Lens	/L43⁸
Lumens		3500K (90 CRI)	-T35				Daylight Blue Lens	/L44⁸
600lm (7W)	-L06	4000K (90 CRI)	-T40				Violet Blue Lens	/L46⁸
1000lm (11W)	-L10	Dim-to-Warm 1800K-3000K	-TWD²				Frosted Soft Focus	/L49⁸
1500lm (15W)	-L15	RGB+W Control (24VDC)	-RGBWV24^{1,5,6}				Ultra Violet Filter	/L50UV⁸
2000lm (21W)	-L20						Micro Prismatic Spread Lens	/L53⁸
2600lm (25W)	-L26						Linear Spread Lens	/L55⁸
3000lm (30W)	-L30							

¹ Special order, minimum order. Extended lead time may apply. Consult Factory.
² (-TWD) is only compatible with (-L15) 1500lm (15W).
³ (-SUN-RMT) sensor sent with mounting clips for existing ceiling applications.
⁴ Must be selected for Wallwash Trim Style.
⁵ Remote Power Supplies and Control Gear required. Consult Factory for details.
⁶ (-RGBWV24) only available with (-L20).
⁷ Wood Ceiling Installation requires above-ceiling access.
⁸ Not available with Wall Wash Trim (LRXLDQ3573).

Consult factory for emergency battery options.

2026.02.04