


## SL900 : 10" DARKLIGHT RECESSED OPEN FACE STEP LIGHT 1000LM (10W)

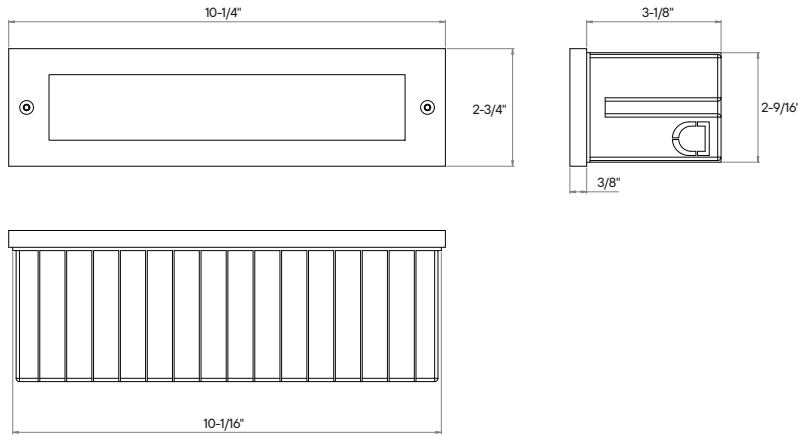

- Multiple Color Temperatures
- IP65 Rated
- IK08 Rated
- Die-Cast Face Plate
- Several Finish Options
- Optional Marine Grade Non-Bacterial Coating
- Achieve up to 8' Fixture Spacing at 3' Mounting Height while maintaining a min. of 2 fc at egress

### ORDERING : SL900W-DIN-T27

 [Click for Full Specification Details](#)

Fixture	Finish	Control	Color Temperature	Emergency Options	Options		
10" Recessed Open Face Step Light 1000lm (10W)	Black White Bronze Silver	<b>B</b> <b>W<sup>2</sup></b> <b>BZ<sup>2</sup></b> <b>S<sup>2</sup></b>	0-10V Dimming (120V/277V) TRIAC/ELV Dimming (120V) UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V) 1%, 0-10V Dimming (120V/277V)	<b>Blank</b> <b>-DIN</b> <b>UE-DUN</b> <b>UE-D10P1</b>	3000K (80 CRI) <b>-T27</b> 3000K (80 CRI) <b>-T30</b> 3500K (80 CRI) <b>-T35</b> 4000K (80 CRI) <b>-T40</b> 5000K (80 CRI) <b>-T50</b>	None Remote Emergency Inverter (25W)  <b>Options</b> None Marine Grade Finish	<b>Blank</b> <b>-EMAC<sup>3</sup></b>  <b>Blank</b> <b>-MGD</b>

<sup>1</sup> Special Order. Minimum order, extended lead time may apply. Consult factory.

<sup>2</sup> Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

<sup>3</sup> Check Wiring Diagram for Remote Emergency Backup.