
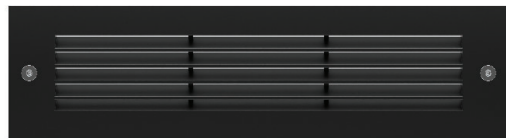


SL932 : 10" DARKLIGHT RECESSED LOUVERED FACE STEP LIGHT 300LM (10W)

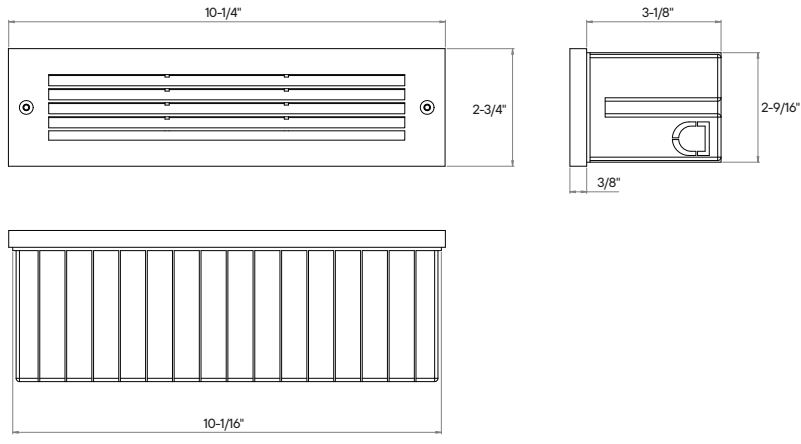

- U.S. Assembled
- 120V
- 277V
- Intertek
- Outdoor
- ADA Compliant
- Damp Location
- Wet
- Ambient Light
- Pathway Lighting
- IP66
- Marine Grade
- Emergency Backup
- Turtle Safe
- IK08

- Multiple Color Temperatures
- Amber Turtle Safe
- IP65 Rated
- IK08 Rated
- Die-Cast Face Plate
- Several Finish Options
- Optional Marine Grade Non-Bacterial Coating
- Achieve up to 8' Fixture Spacing at 3' Mounting Height while maintaining a min. of 2 fc at egress

ORDERING : SL932W-DIN-T27

[Click for Full Specification Details](#)

Fixture	Finish	Control	Color Temperature	Emergency Options	Options	
10" Recessed Louvered Face Step Light 300lm (10W)	SL932	Black B White W² Bronze BZ² Silver S²	0-10V Dimming (120V/277V) Blank TRIAC/ELV Dimming (120V) -DIN UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V) UE-DUN 1%, 0-10V Dimming (120V/277V) UE-D10P1	Blank -DIN UE-DUN UE-D10P1	3000K (80 CRI) -T27 3000K (80 CRI) -T30 3500K (80 CRI) -T35 4000K (80 CRI) -T40 5000K (80 CRI) -T50 Amber - Limited Wavelength (590nm) -TAM-LVR¹	Emergency Options None Blank Remote Emergency Inverter (25W) -EMAC³ Options None Blank Marine Grade Finish -MGD

¹ Special Order. Minimum order, extended lead time may apply. Consult factory.
² Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
³ Check Wiring Diagram for Remote Emergency Backup.

2025.11.03