


WD1340 : 4" ROUND 1-DIRECTION WALL MOUNT (IP65) 1000LM/1500LM (15W/22W)

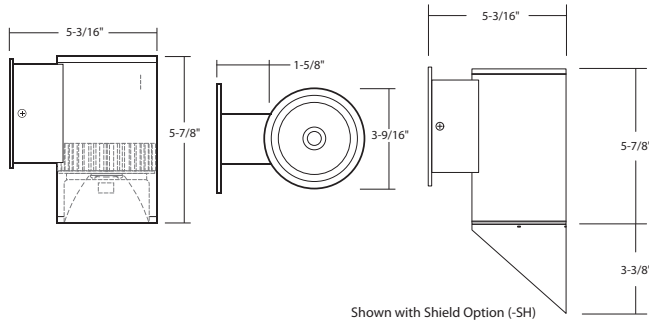

- Uniform, low glare illumination
- Singular COB light source
- New integral emergency option
- UniDim™ dimming option with 2-wire incandescent, 3-wire, ELV or 0-10V controls
- 13' mtg. ht., 22' o.c. spacing (1000 lumen package)
- 25' mtg. ht., 22' o.c. spacing (1500 lumen package)
- 5-year limited warranty
- Photocell available
- Available with Type IV/Forward Throw Optics

ORDERING : WD1340B-L15-CB35UE-D10-EMAC-T30

WD1340

Fixture	Finish	Lumen	Optics	Dimming	Emergency Options	LED	Options
Finish		Optics		Dimming		LED¹	
White	(RAL 9003) W	<i>Standard Beams</i>		Non-Dimming (120V)	Blank	4000K	Blank
Silver	(RAL 7037) S	Wide Flood	Blank	ELV and Triac Dimming (120V)	-DIN⁵	2700K	-T27
Basic Bronze	(RAL 8019) BZ	Narrow Spot	-B10	0-10V Dimming (120V/277V)	UE-D10⁵	2700K (97 CRI)	-T27-C97³
Black	(RAL 9005) B	Spot	-B20			3000K	-T30
Light Silver	(RAL 7036) LS²	Flood	-B45			3000K (97 CRI)	-T30-C97³
Dark Grey	(RAL 7015) DG²	<i>CleanBeam™ Option</i>		UniDim™ (120V/277V)	UE-DUN⁵	3500K	-T35
Metallic Gold	(RAL 1001) MG²	10° Pencil Beam	-B02	0-10V 1% Dimming (120V)	UE-D10P1	5000K	-T50
Metallic Black	(RAL 7021) MB²	20°	-CB20	347V 0-10V Dimming	347-D10	Amber (590nm)	-TAM⁷
Lumen		35°	-CB35	Emergency Options		RGB+W Control (24VDC)	-RGBWV24⁴
1000lm (15W)	Blank	<i>Specialty Beams</i>		Remote	-EMAC	Options	
1500lm (22W)	-L15	Wall Wash	-WW	BackPack (Side Mount)	-EMB-SD	None	Blank
		Type IIVS (110°x 40°)	-BII	BackPack (Face Mount)	-EMB-FC	Black Hexcell Louver	-LVR
		Forward Throw (Type IV)	-IV	BackPack (Empty)	-EMB-BLANK⁸	Photocell Sensor	-SDL
						Surge Protector	-SRG
						Cold Weather	-CW⁶
						Integral Junction Box 1-Entry	-JBL, JBR
						Glare Shield	-SH

¹ Color temperature is 90CRI minimum except where specified.

² Special Order. Minimum order, extended lead time may apply. Consult factory. (Finish options 50 piece minimum. 10-12 week lead time).

³ Special Order. Minimum order, extended lead time may apply. Consult factory.

⁴ Remote Power Supplies and Control Gear Required, Available with Wireless Bluetooth or DMX Control. Consult Factory for Details.

⁵ Standard driver starting temp. -10°C/14°F.

⁶ Starting temperature -30°C/-22°F; see pg 6. Not available with UE-D10P1 and -347-D10 dimming option.

⁷ (-TAM) 590nm AMBER is only available with (Blank) Wide Flood Optic.

⁸ Blank EM enclosure available for Non-EM units to provide a seamless design aesthetic when EM enabled products are installed.

347V Input with 0-10V Dimming available. Consult factory for lead times.

Energy efficient Chip-On-Board (COB) Singular LED Light Source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED Source products.

Binned with 4-step MacAdam ellipses as recommended by ANSI Standard. Available in 2700K, 3000K, 3500K, 4000K, 5000K, RGBW, and 590nm Amber.

(Click for more Information)



[View Full Detailed Specification Sheet](#)