


WD1362EM: 6" ROUND 1-DIRECTION

WALL EMERGENCY (IP65) 1000LM (10W)

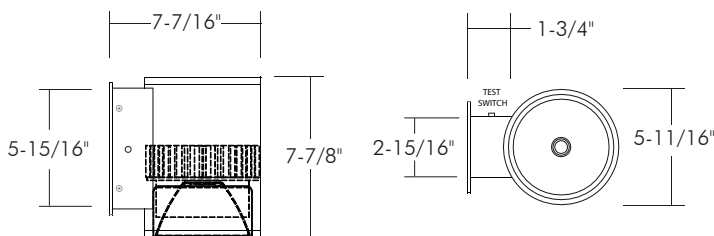

- Illuminated Self-Diagnostic LED test switch
- Uniform, low glare illumination
- Durable, corrosion resistant finish
- Emergency back up available
- Singular COB Light Source
- 1000 lm delivered during emergency operation
- 5-year limited warranty
- IK08 Rated
- New Die-Cast Mounting Plate (-WPDC6)

ORDERING : WD1362EMW-B10UE-D10-T30-LVR



[Click for Full Specification Details](#)

WD1362EM

Fixture	Finish	Lumen	Optics	Control	LED	Options
Finish		Optics		Control		LED
White (RAL 9003) W		<i>Standard Beams</i>		Non-Dimming (120V) Blank		4000K (90 CRI) Blank
Silver (RAL 7037) S		Wide Flood Blank		TRIAC/ELV -DIN		2700K (90 CRI) -T27
Bronze (RAL 8019) BZ		Narrow Spot -B10		Dimming (120V) UE-D10		2700K (97 CRI) -T27-C97²
Black (RAL 9005) B		Spot -B20		0-10V Dimming (120V/277V) UE-D10		3000K (90 CRI) -T30
Light Silver (RAL 7036) LS¹		Flood -B45		UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V) UE-DUN		3000K (97 CRI) -T30-C97²
Dark Grey (RAL 7015) DG¹		<i>CleanBeam™ Option</i>		1%, 0-10V Dimming (120V/277V) UE-D10P1		3500K (90 CRI) -T35
Metallic Gold (RAL 1001) MG¹		10° Pencil Beam -CB10		UniSense - Integral Motion/ Photosensor (120V) -SUN-INT⁵		5000K (90 CRI) -T50
Metallic Black (RAL 7021) MB¹		15° Clean Beam -CB15		UniSense - Integral Motion/ Photosensor (120V) -SUN-INT-1227⁵		Options
Lumen		35° Clean Beam -CB35		Casambi Wireless Dimming (120V/277V) -DCSM⁶		None Blank
1000lm (10W) Blank		<i>Specialty Beams</i>		BubblyNet Wireless System (120V/277V) -DBNT⁶		Hex-Cell Louver -LVR⁴
		Wall Wash -BWW		SimplySnap Wireless System (120V/277V) -DSYN⁶		Integral Junction Box 1-Entry -JBL, JBR³
		Forward Throw (Type IV) -BIV				Integral Junction Box 2-Entries -JB2
		Type II (110° x 40°) -BII²				Junction Box, Conduit Top Entry -JBT
						BackPack (Empty, Side Mount) -EMB-BLANK-SD
						BackPack (Empty, Face Mount) -EMB-BLANK-FC
						Glare Shield -SH
						Marine Grade Finish -MGD
						Die-Cast Oversized Mounting Plate -WPDC6

¹Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
²Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.
³Must Specify Left or Right, see Page 5 for more details.
⁴(-LVR) Hex-Cell Louver is not compatible with CleanBeam Options (-CB10), (-CB15), (-CB35).
⁵(-SUN-INT) and (-SUN-INT-1227) sensor integrated into the reflector. Consult Factory for layout assistance or alternate sensor mounting.
⁶Special Order. Must be ordered with -EMB-BLANK.

Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products.
 Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700k, 3000k, 3500k, 4000k, 5000k, RGBW, and 590nm Amber.
 Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.