


WD1Q360: 6" SQUARE 1-DIRECTION

WALL MOUNT (IP65) 1000LM-2600LM (10W/15W/22W/30W)

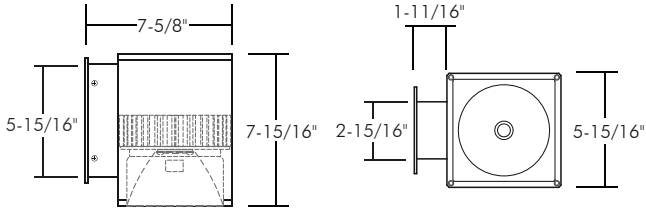

- Uniform, Low Glare Illumination
- Singular COB light source
- New Integral Emergency Option
- Unidim dimming option with 2-wire Incandescent, 3-Wire ELV or 0-10V controls
- 13' Mtg. Ht., 22' O.C. Spacing (1000 lumen package)
- 25' Mtg. Ht., 22' O.C. Spacing (1500 lumen package)
- 5-Year Limited Warranty
- Photocell Available
- Available with Type IV/Forward Throw Optics
- Available with 347Vac, 0-10V dimming
- IK08 Rated
- New Die-Cast Mounting Plate (-WPDC6)

ORDERING : WD1Q360B-L15-B20UE-DUN-EMAC-T27-LVR



[Click for Full Specification Details](#)

Fixture	Finish	Lumen	Optics	Control	Emergency Options	LED	Options
Finish			Optics	Control ³		LED	
White (RAL 9003) W			<i>Standard Beams</i>	Non-Dimming (120V)		Blank	4000K (90 CRI) Blank
Silver (RAL 7037) S			Wide Flood	TRIA/ELV Dimming (120V)		-DIN	2700K (90 CRI) -T27
Bronze (RAL 8019) BZ			Narrow Spot	0-10V Dimming (120V/277V)		UE-D10	2700K (97 CRI) -T27-C97²
Black (RAL 9005) B			Spot	UniDim™ (120V/277V)		UE-DUN	3000K (90 CRI) -T30
Light Silver (RAL 7036) LS ¹			Flood	1%, 0-10V Dimming (120V/277V)		UE-D10P1	3000K (97 CRI) -T30-C97²
Dark Grey (RAL 7015) DG ¹				0-10V Dimming (347V)		-347-D10⁸	3500K (90 CRI) -T35
Metallic Gold (RAL 1001) MG ¹			<i>CleanBeam™ Option</i>	UniSense - Integral		-SUN-INT ¹¹	5000K (90 CRI) -T50
Metallic Black (RAL 7021) MB ¹			10° Pencil Beam	Motion/Photosensor (120V)		-SUN-INT-1227 ¹¹	Amber (590nm) -TAM ¹⁰
			15° Clean Beam	UniSense - Integral			RGB+W Control (24VDC) -RGBWV24⁷
			35° Clean Beam	Motion/Photosensor (120V/277V)		-DCSM ²	
Lumen				Casambi Wireless Dimming (120V/277V)			Options
1000lm (10W)	Blank		<i>Specialty Beams</i>	BubblyNet Wireless System (120V/277V)		-DBNT ²	None Blank
1500lm (15W)	-L15		Wall Wash	SimplySnap Wireless System (120V/277V)		-DSYN ¹²	Hex-Cell Louver -LVR
2200lm (22W)	-L20		Forward Throw (Type IV)				Daylight Sensor -SDL
2600lm (30W)	-L26		Type II (30° x 60°)	Emergency Options			Integral Junction Box 1-Entry -JBL, JBR ⁹
				None			Integral Junction Box 2-Entries -JB2
				Remote Emergency			Junction Box, Conduit Top Entry -JBT
				BackPack (Side Mount)			Surge Protector -SRG
				BackPack (Face Mount)			Cold Weather -CW ^{4,6}
				BackPack (Empty, Side Mount)			Marine Grade Finish -MGD ¹
				BackPack (Empty, Face Mount)			Die-Cast Oversized Mounting Plate -WPDC6

¹Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

²Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.

³Standard driver minimum starting temperature is -10°C / 14°F.

⁴Cold Weather Start (-CW) Starting Temperature -30°C / -22°F.

⁵Blank EM enclosure available for non-EM units to provide a seamless design aesthetic when EM enabled products are installed.

⁶(-EMB-SD) and (-EMB-FC) are not compatible with (-CW) option.

⁷Remote Power Supplies and Control Gear required. Available with Wireless Bluetooth Casambi or DMX 512 control. Consult Factory for Details.

⁸(-347-D10) not available with 1000lm (10W) Lumen option.

⁹Must Specify Left or Right, see Page 7 for more details.

¹⁰(-TAM) 590nm AMBER must be ordered with Blank Lumen, (Blank) Wide Flood Optic and (-LVR) Hex-cell louver.

¹¹(-SUN-INT) sensor integrated into the reflector. Consult Factory for layout assistance or alternate sensor mounting.

¹²Special Order. Must be ordered with -EMB-BLANK.

Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products.

Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700k, 3000k, 3500k, 4000k, 5000k, RGBW, and 590nm Amber.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.