
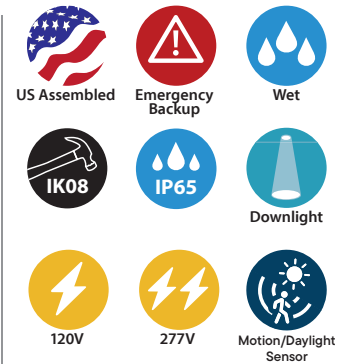


WD1Q362EM: 6" SQUARE 1-DIRECTION

WALL EMERGENCY (IP65) 1000LM-2600LM (10W/15W/22W/30W)

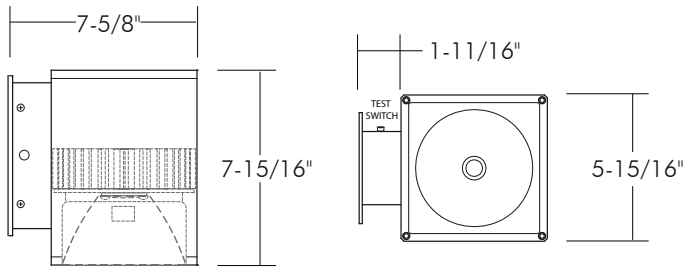

- Illuminated Self-Diagnostic LED test switch
- Uniform, low glare illumination
- Durable, corrosion resistant finish
- Emergency back up available
- Singular COB Light Source
- 800 lm delivered during emergency operation
- 5-year limited warranty
- IK08 Rated
- New Die-Cast Mounting Plate (-WPDC6)

ORDERING : WD1Q362EMW-L15-B10UE-D10-T27-LVR



[Click for Full Specification Details](#)

WD1Q362EM

Fixture	Finish	Lumen	Optics	Control	LED	Options
Finish		Optics		Control		LED
White (RAL 9003) W		<i>Standard Beams</i>		Non-Dimming (120V)	Blank	4000K (90 CRI)
Silver (RAL 7037) S		Wide Flood Blank		0-10V Dimming (120V/277V)	UE-D10	2700K (90 CRI)
Bronze (RAL 8019) BZ		Narrow Spot -B10		UniSense - Integral Motion/Photosensor (120V)	-SUN-INT⁵	2700K (97 CRI)
Black (RAL 9005) B		Spot -B20		UniSense - Integral Motion/Photosensor (120V/277V)	-SUN-INT-1227⁵	3000K (90 CRI)
Light Silver (RAL 7036) LS¹		Flood -B45		Casambi Wireless Dimming (120V/277V)	-DCSM	3000K (97 CRI)
Dark Grey (RAL 7015) DG¹		<i>CleanBeam™ Option</i>		BubblyNet Wireless System (120V/277V)	-DBNT⁶	3500K (90 CRI)
Metallic Gold (RAL 1001) MG¹		10° Pencil Beam -CB10²		SimplySnap Wireless System (120V/277V)	-DSYN⁶	5000K (90 CRI)
Metallic Black (RAL 7021) MB¹		15° Clean Beam -CB15²				
		35° Clean Beam -CB35²				
Lumen						Options
1000lm (10W) Blank						None Blank
1500lm (15W) -L15						Hex-Cell Louver -LVR⁴
2200lm (22W) -L20						Integral Junction Box 1-Entry -JBL, JBR³
2600lm (30W) -L26						Integral Junction Box 2-Entries -JB2
						Junction Box, Conduit Top Entry -JBT
						BackPack (Empty, Side Mount) -EMB-BLANK-SD
						BackPack (Empty, Face Mount) -EMB-BLANK-FC
						Marine Grade Finish -MGD¹
						Die-Cast Oversized Mounting Plate -WPDC6

¹Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

²Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.

³Must Specify Left or Right, see Page 7 for more details.

⁴(-LVR) Hex-Cell Louver is not compatible with CleanBeam Options (-CB10), (-CB15), (-CB35).

⁵(-SUN-INT) sensor integrated into the reflector. Consult Factory for layout assistance or alternate sensor mounting.

⁶Special Order. Must be ordered with -EMB-BLANK.

Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products.

Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700k, 3000k, 3500k, 4000k, 5000k, RGBW, and 590nm Amber.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.