LITON OUTDOOR

TYPE | PROJECT

CATALOG#

WD2360-USA : 6" ROUND

2-DIRECTION WALL MOUNT (IP65) 2 X 1000LM-2600LM (20W-60W)

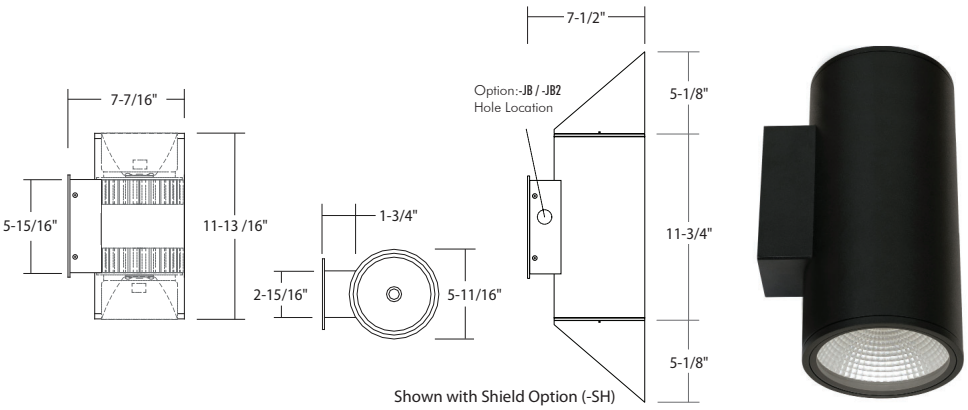

US Assembled | Emergency Backup | Wet | IK08

Uplight | Downlight | Outdoor | IP65

Tamper Resistant | Cold Weather | 120V | 277V

Intertek

- **Produced in USA**
- Uniform, Low Glare Illumination
- Singular COB light source
- New Integral Emergency Option
- 13' Mtg. Ht., 22' O.C. Spacing (1000 lumen package)
- 25' Mtg. Ht., 22' O.C. Spacing (1500 lumen package)
- 5-Year Limited Warranty
- Photocell Available
- Available with Type IV/Forward Throw Optics
- Available with 347Vac, 0-10V dimming
- IK08 Rated
- New Die-Cast Mounting Plate (-WPDC6)

ORDERING : WD2360-USAB-BU20-BD45-UE-D10-EMAC-T27-SDL

Click for Full Specification Details

WD2360-USA

Fixture | Finish | Lumen | Optics | Control | LED | Emergency Options | Options

Finish

White	(RAL 9003)	**W**
Silver	(RAL 7037)	**S**
Bronze	(RAL 8019)	**BZ**
Black	(RAL 9005)	**B**
Light Silver	(RAL 7036)	**LS**[1]
Dark Grey	(RAL 7015)	**DG**[1]
Metallic Gold	(RAL 1001)	**MG**[1]
Metallic Black	(RAL 7021)	**MB**[1]

Lumen

2 x 1000lm	(20W)	**Blank**
2 x 1500lm	(30W)	**-L15**
2 x 2200lm	(45W)	**-L20**
2 x 2600lm	(60W)	**-L26**

Optics

Beam Up	
Standard Beams	
Wide Flood	**Blank**
Narrow Spot	**-BU10**
Spot	**-BU20**
Flood	**-BU45**
CleanBeam™ Option	
10° Pencil Beam	**-CBU10**
15° Clean Beam	**-CBU15**
35° Clean Beam	**-CBU35**
Specialty Beams	
Wall Wash	**-BUWW**
Forward Throw (Type IV)	**-BUIV**
Type II (30° x 60°)	**-BUII**[2]

Beam Down	
Standard Beams	
Wide Flood	**Blank**
Narrow Spot	**-BD10**
Spot	**-BD20**
Flood	**-BD45**
CleanBeam™ Option	
10° Pencil Beam	**-CBD10**
15° Clean Beam	**-CBD15**
35° Clean Beam	**-CBD35**
Specialty Beams	
Wall Wash	**-BDWW**
Forward Throw (Type IV)	**-BDIV**
Type II (30° x 60°)	**-BDII**[2]

Control[3]

Non-Dimming (120V)	**Blank**
0-10V Dimming (120V/277V)	**UE-D10**

LED

2700K (90 CRI)	**-T27**
3000K (90 CRI)	**-T30**
3500K (90 CRI)	**-T35**
4000K (90 CRI)	**-T40**
5000K (80 CRI)	**-T50**

Emergency Options

None	**Blank**
Remote	**-EMAC**
BackPack (Side Mount)	**-EMB-SD**[6]
BackPack (Face Mount)	**-EMB-FC**[6]
BackPack (Empty, Side Mount)	**-EMB-BLANK-SD**[5]
BackPack (Empty, Face Mount)	**-EMB-BLANK-FC**[5]

Options

None	**Blank**
Hex-Cell Louver	**-LVR**[10]
Photocell Sensor	**-SDL**
Integral Junction Box 1-Entry	**-JBL, JBR**[9]
Integral Junction Box 2-Entry	**-JB2**
Junction Box, Conduit Top Entry	**-JBT**
Surge Protector	**-SRG**
Cold Weather	**-CW**[4,6]
Glare Shield (Up)	**-SHU**
Glare Shield (Down)	**-SHD**
Glare Shield (Up and Down)	**-SH**
Independent Control (Up/Down)	**-2CCT**
Marine Grade Finish	**-MGD**[1]
Die-Cast Oversized Mounting Plate	**-WPDC6**

[1] Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
[2] Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.
[3] Standard driver minimum starting temperature is -10°C / 14°F.
[4] Cold Weather (-CW) Starting Temperature -30°C / -22°F.
[5] Blank EM enclosure available for non-EM units to provide a seamless design aesthetic when EM enabled products are installed.
[6] (-EMB-SD) and (-EMB-FC) are not compatible with (-CW) option.
[9] Must Specify Left or Right, see Page 7 for more details.
[10] (-LVR) Hex-Cell Louver is not compatible with CleanBeam Options (-CBU10), (-CBU15), (-CBU35), (-CBD10), (-CBD15), (-CBD35).

Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products.
Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700K, 3000K, 3500K, 4000K, 5000K.
Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.