


# WD261R-19 : LUMENPOLE SINGLE ARM WALL MOUNT

6" FROSTED LENS - 19" HEIGHT 1500LM - 7300LM (18W-85W)

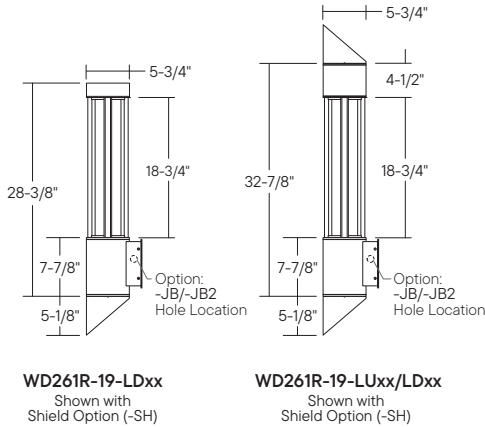

- 6" Round
- Wall mount available with uplight & downlight
- IK08 Impact Rating
- RGBW, and Photocell options
- 5-year warranty
- New Die-Cast Mounting Plate (-WPDC6)

## ORDERING : WD261R-19B-LU26-LD26-BU10-BD60-T27-C80-SH

[Click for Full Specification Details](#)

### WD261R-19

Fixture    Uplight Lumens    Downlight Lumens    Uplight Optic    Downlight Optic    Uplight LED CCT    Downlight LED CCT    Control    Options

Fixture	Uplight Lumens	Uplight Optic	Uplight LED CCT	LED CCT (Center)	Options	
Single Arm w/ 19" Frosted Lens	None 1000lm (10W) - <b>LU10</b> 1500lm (15W) - <b>LU15</b> 2000lm (20W) - <b>LU20</b> 2600lm (25W) - <b>LU26</b>	Blank None Spot Spot Flood Wide Flood	None <b>Blank</b> <b>-BU10</b> <b>-BU20</b> <b>-BU45</b> <b>-BU60</b>	None <b>Blank</b> 2700K (90 CRI) - <b>TU27</b> 2700K (97 CRI) - <b>TU27-C97</b> <sup>1</sup> 3000K (90 CRI) - <b>TU30</b> 3000K (97 CRI) - <b>TU30-C97</b> <sup>1</sup> 3500K (90 CRI) - <b>TU35</b> 4000K (90 CRI) - <b>TU40</b> 5000K (80 CRI) - <b>TU50</b> <sup>1</sup> RGBW (80 CRI) - <b>TURGBW</b> <sup>1,2</sup>	None 2700K (80 CRI) 3000K (80 CRI) 3500K (80 CRI) 4000K (80 CRI) 5000K (80 CRI) RGBW (80 CRI) <b>Control</b>	<b>Blank</b> <b>-T27-C80</b> <sup>1</sup> <b>-T30-C80</b> <b>-T35-C80</b> <b>-T40-C80</b> <b>-T50-C80</b> <sup>1</sup> <b>-RGBW</b> <sup>1,2,3,5</sup> <b>Blank</b> UniDim™ 0-10V, ELV/Triac Dimming (120V/277V) <b>-SUN-INT</b> <sup>5</sup> UniSense - Integral Motion/Photosensor (120V) <b>-SUN-INT-1227</b> <sup>5</sup> Casambi Wireless Dimming (120V/277V) - <b>-DCSM</b> <sup>1</sup> BubblyNet Wireless System (120V/277V) - <b>-DBNT</b> <sup>1</sup> SimplySnap Wireless System (120V/277V) - <b>-DSYN</b> <sup>1</sup>
Finish	Downlight Lumens	Downlight Optic	Downlight LED CCT			
Black <b>B</b>	None	<b>Blank</b>	None			
White <b>W</b> <sup>6</sup>	1000lm (10W) - <b>LD10</b>	None Spot	<b>-BD10</b>			
Silver <b>S</b> <sup>6</sup>	1500lm (15W) - <b>LD15</b>	Spot	<b>-BD20</b>			
Bronze <b>BZ</b> <sup>6</sup>	2000lm (20W) - <b>LD20</b>	Flood	<b>-BD45</b>			
	2600lm (25W) - <b>LD26</b>	Wide Flood	<b>-BD60</b>			

<sup>1</sup> Special order. Minimum order quantity, extended lead time, and setup fee may apply. Consult factory.  
<sup>2</sup> Available with wireless Bluetooth or DMX control. Consult factory for details. Remote power supplies and control gear may be required.  
<sup>3</sup> Not rated for cold weather. Minimum fixture outdoor temperature 0°C (-32°F).  
<sup>4</sup> Starting Temperature -40°C/-40°F.  
<sup>5</sup> (-SUN-INT) mounted differently if ordered with downlight. See page 5 for more details. Consult Factory for any layout assistance.  
<sup>6</sup> Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

2026.03.26