


WD261R : LUMENPOLE DOUBLE ARM WALL MOUNT

6" FROSTED LENS - 28", AND 36" HEIGHT 1500LM - 7300LM (18W-85W)

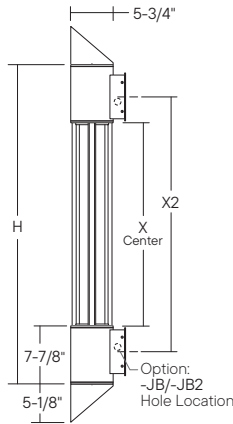

WD261R-28/36-
Shown with Shield Option (-SH)

	X	X2	H
WD261R-28	27-1/2"	34-1/4"	43-1/4"
WD261R-36	36"	42-3/4"	51-3/4"



WD261R-36



- 6" Round
- Wall mount available with uplight & downlight
- IK08 Impact Rating
- RGBW, and Photocell options
- 5-year warranty
- New Die-Cast Mounting Plate (-WPDC6)

ORDERING : WD261R-28B-LU26-LD26-BU10-BD60-TU27-TD27-T27-C80-DCSM1-SH



[Click for Full Specification Details](#)

WD261R

Fixture	Height of Lens	Finish	Uplight Lumens	Downlight Lumens	Uplight Optic	Downlight Optic	Uplight LED CCT	Downlight LED CCT	LED CCT	Control	Options
Fixture	Uplight Lumens	Uplight Optic	Uplight LED CCT	LED CCT (Center)	Options						
Wall Mount	None	Blank	None	Blank	None	Blank	2700K (80 CRI)	-T27-C80¹	None	Blank	
	1000lm (10W)	-LU10	Narrow Spot	-BU10	2700K (90 CRI)	-TU27	3000K (80 CRI)	-T30-C80	Day Light Sensor	-SDL³	
Height of Center	1500lm (15W)	-LU15	Spot	-BU20	2700K (97 CRI)	-TU27-C97¹	3500K (80 CRI)	-T35-C80	Surge Protector (120V/277V)	-SRG³	
28" Frosted Lens	2000lm (20W)	-LU20	Flood	-BU45	3000K (90 CRI)	-TU30	4000K (80 CRI)	-T40-C80	Integral J-Box 1-Entry	-JBL	
	2600lm (25W)	-LU26	Wide Flood	-BU60	3000K (97 CRI)	-TU30-C97¹	5000K (80 CRI)	-T50-C80¹	Integral J-Box 1-Entry	-JBR	
36" Frosted Lens	Downlight Lumens		Downlight Optic		3500K (90 CRI)	-TU35	RGBW (80 CRI)	-RGBW^{1,2}	Integral J-Box 2-Entry	-JB2	
	None	Blank	None	Blank	4000K (90 CRI)	-TU40	Control		Integral J-Box	-JBT	
	1000lm (10W)	-LD10	Narrow Spot	-BD10	5000K (80 CRI)	-TU50¹	UniDim™ 0-10V, ELV/Triac Dimming (120V/277V)	Blank	Top Entry		
Finish	1500lm (15W)	-LD15	Spot	-BD20	RGBW (80 CRI)	-TURGBW^{1,2}	UniSense - Integral Motion/Photosensor (120V)	-SUN-INT⁵	Glare Shield Up	-SHU	
Black	2000lm (20W)	-LD20	Flood	-BD45	None	Blank	UniSense - Integral Motion/Photosensor (120V)	-SUN-INT-1227⁵	Glare Shield Down	-SHD	
White	2600lm (25W)	-LD26	Wide Flood	-BD60	2700K (90 CRI)	-TD27	Casambi Wireless Dimming (120V/277V)	-DCSM¹	Glare Shield Up & Down	-SH	
Silver					2700K (97 CRI)	-TD27-C97¹	BubblyNet Wireless System (120V/277V)	-DBNT¹	Cold Weather	-CW⁴	
Bronze					3000K (90 CRI)	-TD30	SimplySnap Wireless System (120V/277V)	-DSYN¹	Marine Grade Finish	-MGD^{1,6}	
					3000K (97 CRI)	-TD30-C97¹			Independent Control (Up/Down)	-2CCT	
					3500K (90 CRI)	-TD35			Die-Cast Oversized Mounting Plate	-WPDC6	
					4000K (90 CRI)	-TD40					
					5000K (80 CRI)	-TD50					
					RGBW (80 CRI)	-TDRGBW^{1,2}					

¹ Special order. Minimum order quantity, extended lead time, and setup fee may apply. Consult factory.
² Available with wireless Bluetooth or DMX control. Consult factory for details. Remote power supplies and control gear may be required.
³ Not rated for cold weather. Minimum fixture outdoor temperature 0°C (-32°F).
⁴ Starting Temperature -40°C/-40°F.
⁵ (-SUN-INT) mounted differently if ordered with downlight. See page 5 for more details. Consult Factory for any layout assistance.
⁶ Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.