


WD2Q360-USA : 6" SQUARE

2-DIRECTION ALL MOUNT (IP65) 2 X 1000LM-2600LM (20W/30W/45W/60W)

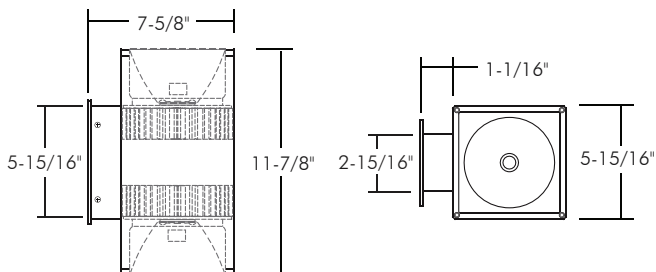

- Produced in USA**
- Uniform, Low Glare Illumination
 - Singular COB light source
 - New Integral Emergency Option
 - 13' Mtg. Ht., 22' O.C. Spacing (1000 lumen package)
 - 25' Mtg. Ht., 22' O.C. Spacing (1500 lumen package)
 - 5-Year Limited Warranty
 - Photocell Available
 - Available with Type IV/Forward Throw Optics
 - IK08 Rated
 - New Die-Cast Mounting Plate (-WPDC6)

ORDERING : WD2Q360-USAB-L15-BU10-BD45UE-D10-T27-LVR
WD2Q360-USA



[Click for Full Specification Details](#)

Fixture	Finish	Lumen	Optics	Control	Emergency Options	LED	Options
Finish		Optics		Control³		LED	
White (RAL 9003) W		Beam Up		Beam Down	Non-Dimming (120V)	Blank	2700K (90 CRI) -T27
Silver (RAL 7037) S		Standard Beams		Standard Beams	0-10V Dimming (120V/277V)	UE-D10	3000K (90 CRI) -T30
Bronze (RAL 8019) BZ		Wide Flood	Blank	Wide Flood	Blank		3500K (90 CRI) -T35
Black (RAL 9005) B		Narrow Spot	-BU10	Narrow Spot	-BD10	Emergency Options	4000K (90 CRI) -T40
Light Silver (RAL 7036) LS¹		Spot	-BU20	Spot	-BD20	None	5000K (80 CRI) -T50
Dark Grey (RAL 7015) DG¹		Flood	-BU45	Flood	-BD45	Remote Emergency	
Metallic Gold (RAL 1001) MG¹						BackPack (Side Mount)	Blank
Metallic Black (RAL 7021) MB¹		CleanBeam™ Option		CleanBeam™ Option		BackPack (Face Mount)	-EMAC
		10° Pencil Beam -CBU10		10° Pencil Beam -CBD10		BackPack (Empty, Side Mount)	-EMB-SD⁶
		15° Clean Beam -CBU15		15° Clean Beam -CBD15		BackPack (Empty, Face Mount)	-EMB-FC⁶
		35° Clean Beam -CBU35		35° Clean Beam -CBD35		BackPack (Empty, Side Mount)	-EMB-BLANK-SD⁵
						BackPack (Empty, Face Mount)	-EMB-BLANK-FC⁵
Lumen		Specialty Beams		Specialty Beams			Options
2 x 1000lm (20W) Blank		Wall Wash -BUWW		Wall Wash -BDWW			None Blank
2 x 1500lm (30W) -L15		Forward Throw (Type IV) -BUIV		Forward Throw (Type IV) -BDIV			Hex-Cell Louver -LVR¹⁰
2 x 2200lm (45W) -L20		Type II (110° x 40°) -BU1I²		Type II (110° x 40°) -BD1I²			Photocell Sensor -SDL
2 x 2600lm (60W) -L26							Integral Junction Box 1-Entry -JBL, JBR⁹
							Integral Junction Box 2-Entries -JB2
							Junction Box, Conduit Top Entry -JBT
							Surge Protector -SRG
							Cold Weather -CW^{4,6}
							Independent Control (Up/Down) -2CCT
							Marine Grade Finish -MGD¹
							Die-Cast Oversized Mounting Plate -WPDC6

¹Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
²Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.
³Standard driver minimum starting temperature is -10°C / 14°F.
⁴Cold Weather Start (-CW) Starting Temperature -30°C / -22°F.
⁵Blank EM enclosure available for non-EM units to provide a seamless design aesthetic when EM enabled products are installed.
⁶(-EMB-SD) and (-EMB-FC) are not compatible with (-CW) option.
⁹Must Specify Left or Right.
¹⁰(-LVR) Hex-Cell Louver is not compatible with CleanBeam Options (-CBU10), (-CBU15), (-CBU35), (-CBD10), (-CBD15), (-CBD35).

Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products.
 Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700K, 3000K, 3500K, 4000K, and 5000K.
 Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

2026.03.20