


WD2Q360 : 6" SQUARE 2-DIRECTION

WALL MOUNT (IP65) 2 X 1000LM-2600LM (20W/30W/45W/60W)

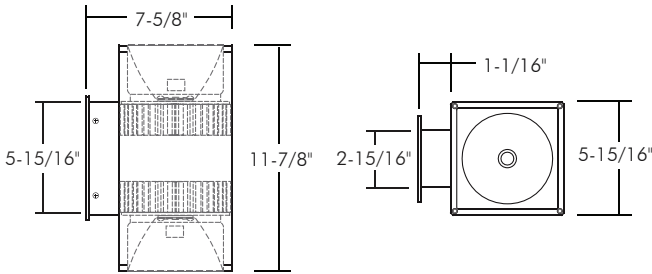

- Uniform, Low Glare Illumination
- Singular COB light source
- New Integral Emergency Option
- Unidim dimming option with 2-wire Incandescent, 3-Wire ELV or 0-10V controls
- 13' Mtg. Ht., 22' O.C. Spacing (1000 lumen package)
- 25' Mtg. Ht., 22' O.C. Spacing (1500 lumen package)
- 5-Year Limited Warranty
- Photocell Available
- Available with Type IV/Forward Throw Optics
- Available with 347Vac, 0-10V dimming
- IK08 Rated
- New Die-Cast Mounting Plate (-WPDC6)

ORDERING : WD2Q360B-L15-BU10-BD45UE-DUN-T27-LVR



[Click for Full Specification Details](#)

Fixture	Finish	Lumen	Optics	Control	Emergency Options	LED	Options
Finish		Optics		Control³		LED	
White	(RAL 9003) W	Ⓢ <i>Beam Up</i>		Ⓢ <i>Beam Down</i>		Non-Dimming (120V)	Blank
Silver	(RAL 7037) S	<i>Standard Beams</i>		<i>Standard Beams</i>		TRIAC/ELV Dimming (120V)	-DIN
Bronze	(RAL 8019) BZ	Wide Flood	Blank	Wide Flood	Blank	0-10V Dimming (120V/277V)	UE-D10
Black	(RAL 9005) B	Narrow Spot	-BU10	Narrow Spot	-BD10	UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	UE-DUN
Light Silver	(RAL 7036) LS¹	Spot	-BU20	Spot	-BD20	1%, 0-10V Dimming (120V/277V)	UE-D10P1
Dark Grey	(RAL 7015) DG¹	Flood	-BU45	Flood	-BD45	0-10V Dimming (347V)	-347-D10⁸
Metallic Gold	(RAL 1001) MG¹	<i>CleanBeam™ Option</i>		<i>CleanBeam™ Option</i>		UniSense - Integral Motion/Photosensor (120V)	-SUN-INT¹¹
Metallic Black	(RAL 7021) MB¹	10° Pencil Beam	-CBU10	10° Pencil Beam	-CBD10	UniSense - Integral Motion/Photosensor (120V/277V)	-SUN-INT-1227¹¹
		15° Clean Beam	-CBU15	15° Clean Beam	-CBD15	Casambi Wireless Dimming	-DCSM¹²
		35° Clean Beam	-CBU35	35° Clean Beam	-CBD35	BubblyNet Wireless System	-DBNT¹³
		<i>Specialty Beams</i>		<i>Specialty Beams</i>		SimplySnap Wireless System	-DSYN¹³
Lumen		Wall Wash	-BUWW	Wall Wash	-BDWW	Emergency Options	
2 x 1000lm (20W)	Blank	Forward Throw (Type IV)	-BUIV	Forward Throw (Type IV)	-BDIV	None	Blank
2 x 1500lm (30W)	-L15	Type II (110° x 40°)	-BU1I²	Type II (110° x 40°)	-BD1I²	Remote Emergency	-EMAC
2 x 2200lm (45W)	-L20					BackPack (Side Mount)	-EMB-SD⁶
2 x 2600lm (60W)	-L26					BackPack (Face Mount)	-EMB-FC⁶
						BackPack (Empty, Side Mount)	-EMB-BLANK-SD⁵
						BackPack (Empty, Face Mount)	-EMB-BLANK-FC⁵
						Options	
						None	Blank
						Hex-Cell Louver	-LVR¹⁰
						Photocell Sensor	-SDL
						Integral Junction Box 1-Entry	-JBL, JBR⁹
						Integral Junction Box 2-Entries	-JB2
						Junction Box, Conduit Top Entry	-JBT
						Surge Protector	-SRG
						Cold Weather	-CW^{4,6}
						Independent Control (Up/Down)	-2CCT
						Marine Grade Finish	-MGD
						Die-Cast Oversized Mounting Plate	-WPDC6

¹Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
²Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.
³Standard driver minimum starting temperature is -10°C / 14°F.
⁴Cold Weather Start (-CW) Starting Temperature -30°C / -22°F.
⁵Blank EM enclosure available for non-EM units to provide a seamless design aesthetic when EM enabled products are installed.
⁶(-EMB-SD) and (-EMB-FC) are not compatible with (-CW) option.
⁷Remote Power Supplies and Control Gear required. Available with Wireless Bluetooth Casambi or DMX 512 control. Consult Factory for Details.
⁸(-347-D10) not available with 1000lm (10W) Lumen option.
⁹Must Specify Left or Right, see Page 7 for more details.
¹⁰(-LVR) Hex-Cell Louver is not compatible with CleanBeam Options (-CBU10), (-CBU15), (-CBU35), (-CBD10), (-CBD15), (-CBD35).
¹¹(-SUN-INT) sensor integrated into the reflector. Consult Factory for layout assistance or alternate sensor mounting.
¹²Special Order. Must be ordered with -EMB-FC, or -EMB-BLANK.
¹³Special Order. Must be ordered with -EMB-BLANK

Energy Efficient Chip-On-Board (COB) Singular LED Light source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED source products.
 Binned with 3-Step MacAdam Ellipses as recommended by Ansi Standard. Available in 2700k, 3000k, 3500k, 4000k, 5000k, RGBW, and 590nm Amber.
 Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

2026.03.20