


WLP31 : 9" DEXTERO ADJUSTABLE FLOOD

3300LM (25W) - 5400LM (40W) - 8000LM (60W)

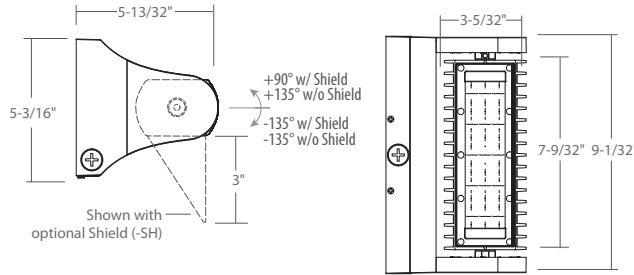

- Adjustable Design
- Durable, corrosion resistant finish
- Lamp equivalent of 50W HID for 25W, 100W HID for 40W, and 150W HID for 60W package
- Emergency back up available
- 5-year limited warranty
- 120V/277V
- Dark Sky Compliant Option

ORDERING : WLP31W-25WUE-D10-T30-SH

[Click for Full Specification Details](#)

WLP31

Fixture	Finish	Lumens	Driver	Color Temperature	Options	Shielded
Finish	Driver	Color Temperature	Options			
Bronze	Blank	Non-Dimming (120V)	Blank	4000K	Blank	None
White	W¹	Non-Dimming (120V/277V)	UE	3000K	-T30	Remote Location
Black	B	0-10V Dimming (120V/277V)	UE-D10	5000K	-T50²	Emergency Inverter
Silver	S¹	2-Wire, ELV, 0-10V Dimming (120V/277V)	UE-DUN			Integral Daylight Sensor
		Integral 10W Emergency, 0-10V Dimming	UE-D10-EMA³			Cold Weather
		347V, 0-10V Dimming	-347-D10³			
Lumens						Shielded
3300lm (25W)	-25W					None
5400lm (40W)	-40W					Shield
8000lm (60W)	-60W					
						Blank
						-EMAC
						-SDL
						-CW⁴
						Blank
						-SH

¹ Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.
² Special Order. Minimum order quantity (MOQ), extended lead time may apply. Consult Factory.
³ (-347-D10) and (UE-D10-EMA) not available for 60W lumen package.
⁴ (-CW) not compatible with (UE-DUN) and (UE-D10-EMA).

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

OPTIONAL MOUNTING ACCESSORIES



WLP-RCS
 Dextero Adjustable
 Recessed Housing