TYPE PROJECT

CATALOG#

CH6SHL : 6" C·SERIES

SUPER LOW GLARE - SHALLOW LED NEW CONSTRUCTION AMBER (TURTLE SAFE) 200LM - 250LM (10W - 12W)

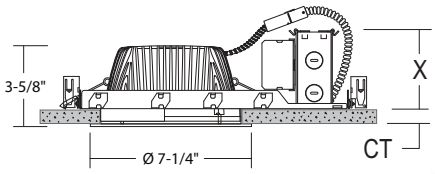

X = 3-7/16" (frame bottom to fixture top)



Ceiling Thickness (CT) = 1/4" (Min), 2" (Max.)
Ceiling Cut-Out: 6-1/2"

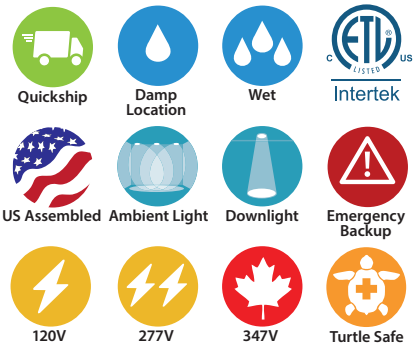

- Low glare with 25° visual cutoff and frosted polycarbonate lens
- Shallow 3-1/8" depth for ceilings with minimal plenum air-space
- Non-conductive dead-front flanged option (-LENS) for wet locations
- True Amber (590nm) Non-PC

ORDERING : CH6SHL10UE-D10/CR6SHL24BB-TAM

Click for Full Specification Details

CH6SHL10				/			
Lumens	Control	Emergency Options	J-Box		Reflector Finish	CCT	Options

Lumens

200lm (10W)	**CH6SHL10**
250lm (12W)	**CH6SHL12**

Control[1]

0-10V Dimming	**UE-D10**
TRIAC/ELV Dimming (120V)	**-DIN**
0-10V Dimming (347V)	**-347-D10[2]**
0-10V Dimming with 10W Integral Emergency Battery Backup	**UE-D10-EMA[3]**
DMX Dimming with input via XLR5 (120V/277V)	**UE-DMXLR5**
DMX Dimming with input via RJ45 (120V/277V)	**UE-DMXRJ45**

Emergency Options

None	**Blank**
10W Emergency Battery	**-EM**
Full Power Emergency Inverter	**-EMAC[4]**
Full Power Emergency Inverter (347V)	**-EMAC347[4]**
GTD Device	**-GTD**

J-Box

Standard	**Blank**
Junction Box (Chicago Plenum)	**-CHP**

Reflector Finish

All Black	**/CR6SHL24BB[2]**

Color Temperature

590nm Amber	**-TAM**

Options

None	**Blank**
Lens for wet locations w/ 60° Beam Spread	**-LENS60**
Lens for wet locations w/ 110° Beam Spread	**-LENS110**

2025.12.16

[1] All drivers are 120V/277V unless otherwise noted.
[2] Extended Lead Time. Consult Factory.
[3] UE-D10-EMA is not compatible with -EM or -EMAC or -EMAC347 or -GTD.
[4] Check wiring diagram.

COMPATABILITY

VR800
Outdoor Vandal Resistant
Ceiling/Wall Kit