

## LR12 - SHOWER TRIM W/ ALBALITE LENS


6" LINE VOLTAGE TRIMS

### PROJECT INFORMATION


Type :

Project :

Catalog # :

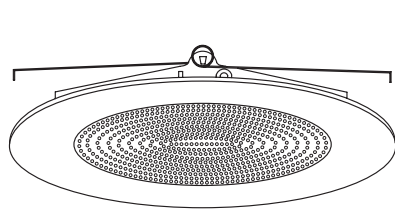

5 1/8"

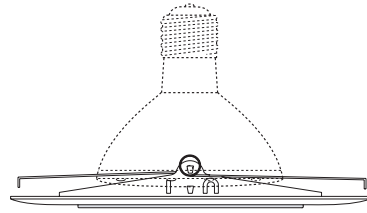

8 1/8"

### FEATURE(S):



### SPECIFICATION

120V 60W Max A19 - Non IC Version  
120V 40W Max A19 - ICA Version






**Application:** The lensed trim is an excellent choice to illuminate a shower or bath. These trims produce a strong vibrant light that fully illuminates the shower and bath areas without drawing attention to the source. These trims are also available with a clear reflector when greater illumination is desired without increasing the lamp wattage.

**Mounting** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Ring Finish:** Die-Formed Construction Available in White, White (Plastic), Chrome, Gold, Natural, Copper and Mocha.

**Label:** U.L. Listed, E.T.L. Listed

### COMPATIBILITY

 <b>LH27</b> STANDARD SHALLOW HOUSING	 <b>LH27R</b> REMODEL SHALLOW HOUSING	 <b>LH7</b> STANDARD HOUSING
 <b>LH7IC</b> 100W IC HOUSING ( )	 <b>LH7R</b> REMODEL HOUSING	

Note: Wattage limitations on compatible items must be met.

### ORDERING

ORDERING EXAMPLE : LR12MCO-WL

LR12	RING FINISH	RATING
<b>LR12</b>	<b>MW</b> :White	<b>Blank</b> :Damp Location
	<b>PW</b> :White (Plastic)	<b>-WL</b> :Wet Location
	<b>MC</b> :Chrome	
	<b>MG</b> :Gold	
	<b>MN</b> :Natural	
	<b>MCO</b> :Copper	
	<b>MO</b> :Mocha	