

## LR88 - REFLECTOR

### 6" COMPACT FLUORESCENT TRIMS - LH276-2 SERIES




## PROJECT INFORMATION

Type :

Project :

Catalog # :

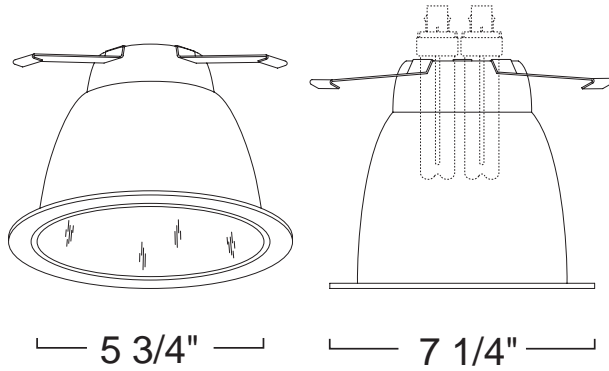

## FEATURE(S):



## SPECIFICATION

CFL (2) 18W Max DTT

**Application:** Great for basic area lighting of a room or space. The 6" reflector trims produce a low, bright illumination with a choice of reflector and trim ring color combination. The clear reflector produces a maximum light output while minimizing the source. The black reflector creates a "hidden" effect that obscures the glare of the lamp. All of the color choices create an outstanding general illumination that is suitable in both residential and light commercial applications.

**Mounting** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Reflector Finish \*:** Spun Aluminum Reflector. Conceals view into housing. Available in White, Black, Clear, Champagne Gold, All Copper and Satin Haze.

**Ring Finish:** Die-Formed Aluminum Trim Ring Available in White, Black, Gold, Natural and Copper.

**Label:** U.L. Listed, E.T.L. Listed

**Assembled in U.S.A.**

## COMPATIBILITY



LH276

STANDARD HOUSING  
2-LAMP



LH276R

REMODEL HOUSING 2-  
LAMP

Note: Wattage limitations on compatible items must be met.

## ORDERING

ORDERING EXAMPLE : LR88W

LR88	REFLECTOR FINISH *	RING FINISH
LR88	<b>W</b> :White	<b>Blank</b> :White
	<b>B</b> :Black	<b>B</b> :Black
	<b>C</b> :Clear	<b>G</b> :Gold
	<b>CH</b> :Champagne Gold	<b>N</b> :Natural
	<b>CO</b> :All Copper	<b>CO</b> :Copper
	<b>S</b> :Satin Haze	

\* Finishes designated with "ALL" prior to the finish color come standard with a matching ring finish. Use "W" for White Ring.