


## LR1588 - ADJUSTABLE SPOT

### 5" LOW VOLTAGE TRIMS

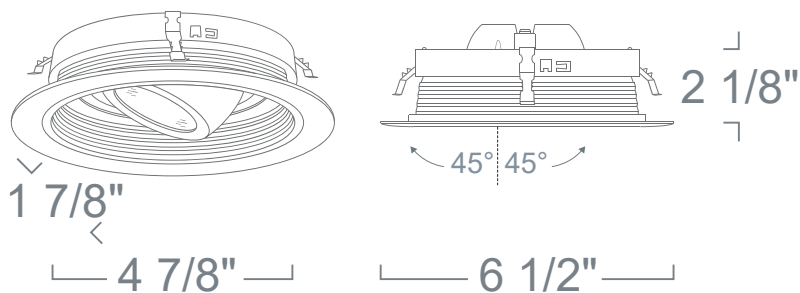

up to 35 degree rotation

### SPECIFICATION

12V 75W Max MR16 GU5.3

**Application:** This 5 inch low voltage aiming trim allows the designer to take full advantage of the precision lighting of an MR16 lamp. The trim can function as a general downlight, using the grooved baffles to reduce light glare.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Baffle Finish:** Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black and All Natural\*.

**Ring Finish:** Die-Formed Aluminum Trim Ring Available in White, Black, Chrome, Gold and Natural.

### COMPATIBILITY



[LH1599](#)

STANDARD HOUSING



[LH1599IC](#)

IC HOUSING

Note: Wattage limitations on compatible items must be met.

### FEATURE:



ORDERING EXAMPLE : LR1588W

LR1588	BAFFLE FINISH	RING FINISH
LR1588	<b>W</b> :White	<b>Blank</b> :White
	<b>B</b> :Black	<b>B</b> :Black
		<b>C</b> :Chrome
		<b>G</b> :Gold
		<b>N</b> :Natural

ID#: 188