


LR2677 - ADJUSTABLE AR111 W/ BAFFLE

6" LOW VOLTAGE TRIMS

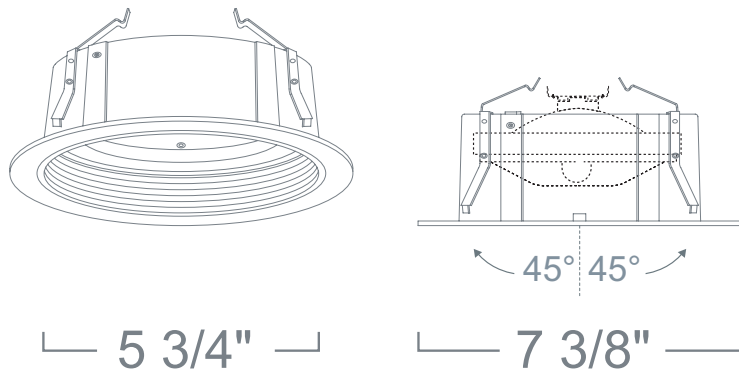

SPECIFICATION

12V 75W Max AR111 TERMINAL





Application: The adjustable **Gimbal** low voltage trims combines the advantages of an adjustable trim with the illumination of a large, low voltage lamp. This style of trim is offered as an adjustable **Baffle** trim and can be used in general lighting and accent lighting applications.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Baffle Finish: Die-formed aluminum baffle ridges eliminate stray light. Available in White, Black, All Natural, All Copper* and All Mocha*.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Natural, Copper and Mocha.

COMPATIBILITY

 LH7LV STANDARD HOUSING 120V/277V	 LH7LVC IC HOUSING	 LH7RLV REMODEL HOUSING 120V/277V
 LK50 MR16 RETROFIT TRANSFORMER		

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR2677B

LR2677	BAFFLE FINISH	RING FINISH
LR2677	W :White	Blank :White
	B :Black	B :Black
	N :All Natural	N :Natural
	CO :All Copper*	CO :Copper
	MO :All Mocha*	MO :Mocha

* Comes standard with a matching ring finish. Use "W" for White Ring.

ID#: 160