


LRSQ1316 - ADJUSTABLE ACCENT 3" LOW VOLTAGE TRIMS

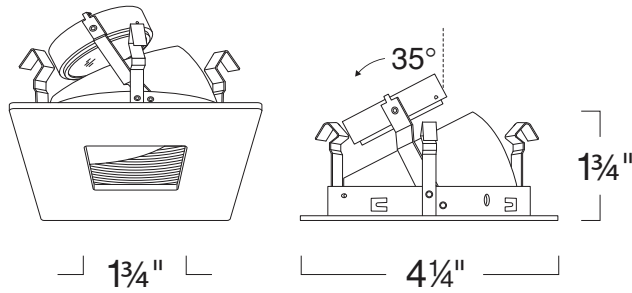

SPECIFICATION

MR16 GU10

The 3" Square Aperture Trim is a simple, functional and modern trim style perfect for today's ever changing interiors use Low Voltage or Line Voltage MR16 lamps. They are designed to be seamlessly installed into existing LH1399 and LH3 round aperture housings.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.











Finish: One Piece Seamless Die-Cast Square Trim Available in All White, All Black, Black Baffle/ White Ring and All Natural Metal.

Accessories: Takes up to (2) 2" Media.

Label: UL Listed, cETL Listed

Limitation: Not for use w/Shallow Housings.

COMPATIBILITY

| | | |
|---|--|---|
|  LH1399 STANDARD HOUSING |  LH1399R REMODEL HOUSING |  LH1399IC IC DOUBLE WALL HOUSING |
|  LSH1399 SHALLOW HOUSING |  LSH1399RE SHALLOW REMODEL HOUSING |  LSH1399IC SHALLOW IC HOUSING |
|  LH3A-GU10 STANDARD HOUSING |  LH3RA-GU10 REMODEL HOUSING |  LH1399R-SL REMODEL HOUSING THIN FLANGE |
|  LH3R-GU10-SL STANDARD HOUSING THIN FLANGE | | |

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LRSQ1316BW

LRSQ1316 FINISH

| | |
|-----------------|-------------------------------------|
| LRSQ1316 | W :All White |
| | BB :All Black |
| | BW :Black Baffle/ White Ring |
| | N :All Natural Metal |

ID#: 2016