


# DLQ340 : 4" SQUARE

CEILING DOWNLIGHT (IP65) AMBER (TURTLE SAFE) 200LM (12W)

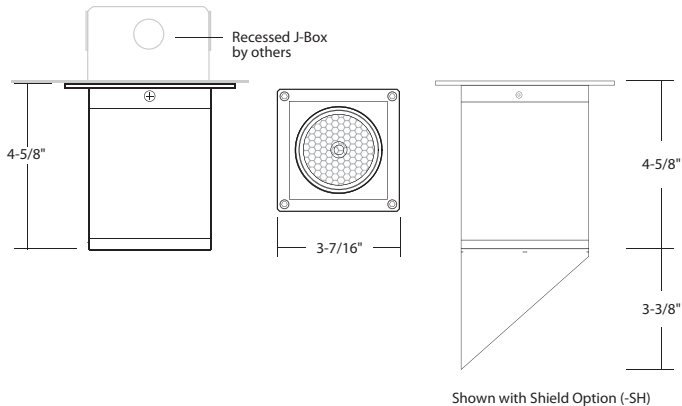

- True Amber Narrow Wavelength 590nm LED
- Integral Surface J-Box Option
- Emergency back up available
- 5-Year Limited Warranty
- IK08 Rated

## ORDERING : DLQ340B-UE-DUN-TAM-LVR-EMAC-JB



[Click for Full Specification Details](#)

Finish	Control	LED	Emergency Options	Options
White	<b>DLQ340W</b>	Non-Dimming (120V)	<b>Blank</b>	None
Silver	<b>DLQ340S</b>	UniDim™ 0-10V, TRIAC/ELV Dimming (120V/277V)	<b>UE-DUN</b>	Cold Weather <b>-CW<sup>3</sup></b>
Bronze	<b>DLQ340BZ</b>	Casambi Wireless Dimming (120V/277V)	<b>-DCSM<sup>1,4</sup></b>	Surge Protector <b>-SRG</b>
Black	<b>DLQ340B</b>	BubblyNet Wireless System (120V/277V)	<b>-DBNT<sup>1,4</sup></b>	Daylight Sensor (120V) <b>-SDL</b>
Light Silver	<b>DLQ340LS<sup>2</sup></b>	SimplySnap Wireless System (120V/277V)	<b>-DSYN<sup>1</sup></b>	Integral Junction Box <b>-JB</b>
Dark Grey	<b>DLQ340DG<sup>2</sup></b>			Glare Shield <b>-SH</b>
Metallic Gold	<b>DLQ340MG<sup>2</sup></b>			Marine Grade Finish <b>-MGD<sup>2</sup></b>
Metallic Black	<b>DLQ340MB<sup>2</sup></b>			
			<b>LED</b>	
			590nm Amber	<b>-TAM-LVR</b>
			<b>Emergency Options</b>	
			None	<b>Blank</b>
			Remote Emergency Inverter	<b>-EMAC</b>
			Emergency in Canopy for Surface Mounted Fixture	<b>-EMA</b>
			Emergency in Canopy for Pendant Mounted Fixture	<b>-EMA/PM</b>

<sup>1</sup> Special order. Minimum Order, Extended lead time may apply. Consult Factory.

<sup>2</sup> Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

<sup>3</sup> Starting Temperature -40°C/-40°F. Only available with (UE-DUN) control option.

<sup>4</sup> Special Order. Sent with surface mount JBOX to allow for direct-conduit entry.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.