INSTALLATION INSTRUCTIONS for WS977 & WSQ977 "Surface Mount"

CATALOG # : WS977 & WSQ977 9" ROUND/SQUARE DARKLIGHT "Surface Mount"

SAVE THESE INSTRUCTIONS

CAUTION- INSTALL AND USE THIS LUMINAIRE FOLLOWING YOUR LOCAL ELECTRICAL CODES AND REGULATIONS.

PREPARATION:

1). Read and understand instructions completely before installing this luminaire. If you are unfamiliar with electrical wiring have a qualified licensed electrician install this luminaire for you.

ELECTRICAL CONNECTIONS:

1). **WARNING-** Before starting the wire connections, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse panel. Turning the power off using the light switch is not sufficient to prevent electrical shock.

2). This luminaire must be connected with supply wire rated at 90° C. Most dwellings built before 1985 have supply wire rated at 60° C; consult a qualified electrician before installing.

Step 1

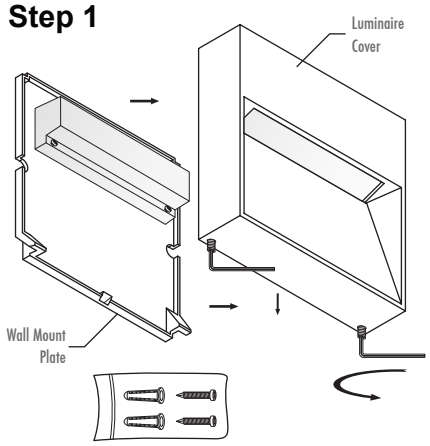

Remove Luminaire Mounting Parts for Installation.

Step 2

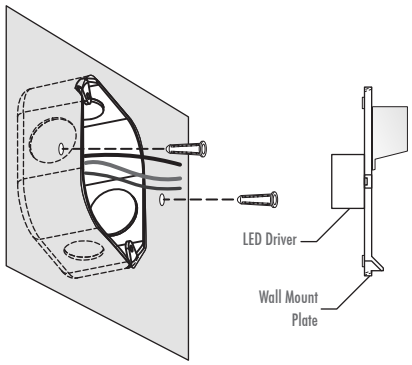

Mark and Install the Screw Anchors (provided) on wall surface.

Step 3

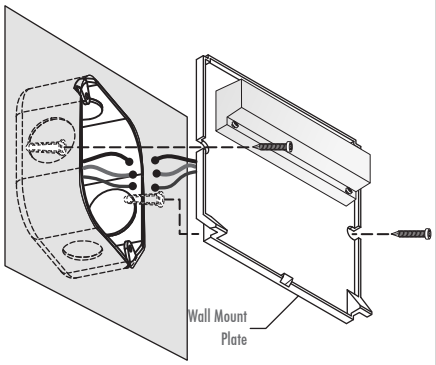

Connect the Wires from Luminaire to Input Wires from junction box. **SEE WIRING DIAGRAM**

Step 4

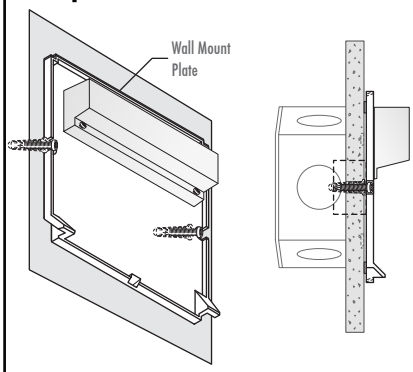

Install Lluminaire Plate Assembly on Mounting Surface. Align the holes to the Anchors and fasten using the Screws (provided).

Step 5

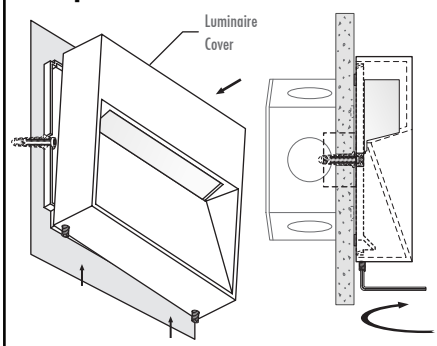

First, insert the Bottom of Luminaire Cover to Mtg. Plate, then push the Top and fasten by screw in the Set-Screw until it gets tighten and secured.

Step 6 **Final Installation**

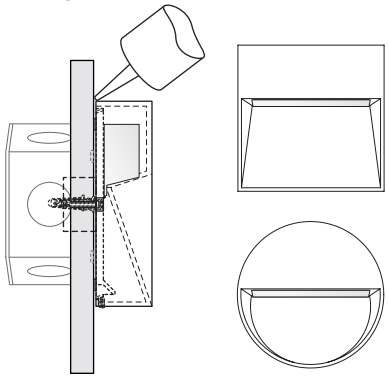

Apply Sealant all around the Luminaire and Surface to prevent water entry.

INPUT **WIRING DIAGRAM**

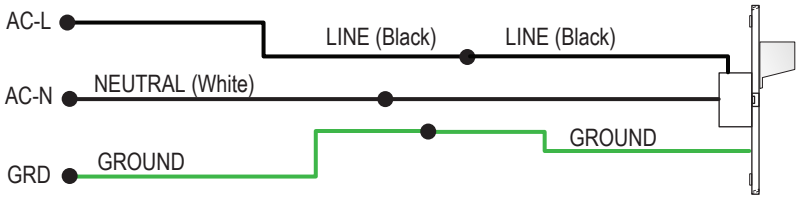

INSTALLATION INSTRUCTIONS