


PROJECT INFORMATION


Type :

Project :

Catalog # :

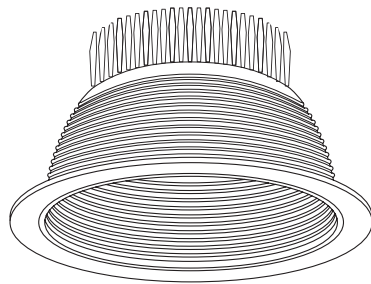

5 3/4"



7 1/2"

FEATURE(S):



SPECIFICATION

L.E.D. 10W/15W

Mounting Steel pressure springs mounted on trim to ensure positive retention inside housing.

Power Connection: LED heat sinked lamp module is replaceable via on board quick disconnect terminal. No tools required.

Thermal Management: Heat dissipation facilitated by integral aluminum heat sink to maximize heat rejection.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Baffle Finish: Available in White and Black.

Ring Finish: Only available in White.

Beam Spread: Available in Flood, Narrow Flood and Wide Flood.

Accessories: Lamp included in packaging.

Limitation: Not for use w/Shallow Housings.

Assembled in U.S.A.

COMPATIBILITY



LHLD6

6" IC L.E.D. HOUSING



LHLD6R

6" IC REMODEL L.E.D. HOUSING

L.E.D. Details:

10W 450 + Lumens Delivered

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Estimated Life: 50,000 hr. L70

Lamp Equivalents: 50W MR16, PAR20, PAR30, 75W A19

15W 650 + Lumens Delivered

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Estimated Life: 40,000 hr. L70

Lamp Equivalents: 75W MR16, PAR30, PAR38, 100W A19

Note: Wattage limitations on compatible items must be met.

ORDERING

ORDERING EXAMPLE : LRLD693W-B45

| LRLD693 | BAFFLE FINISH | RING FINISH | BEAM SPREAD |
|---------|-----------------|---------------------|---------------------------|
| LRLD693 | W :White | Blank :White | -B25 :Narrow Flood |
| | B :Black | | -B45 :Flood |
| | | | -B60 :Wide Flood |