
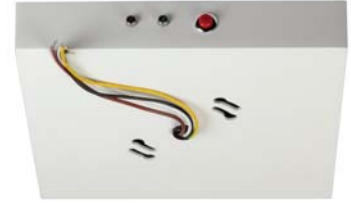


## LCMPD7Q-EMA : 7" LUMENPAD SQUARE INTEGRAL EMERGENCY BATTERY BACKUP (14W)



Light fixture is **NOT** included with LED Emergency Backup.

### SPECIFICATION

**Product Description:** In the event of a power failure, this Surface Mounted LED Emergency backup switches to the emergency mode and operates the existing fixture for 90 minutes. The unit contains a battery, charger, and converter circuit in a single enclosure.  
WET LOCATION - For covered ceiling mount only.

### TECHNICAL SPECIFICATIONS:

Voltage	120-277VAC/60Hz
Wattage	14W
Switching Time	< 1s
Charging Time	24h
Operating Time	90 minutes
Minimum Temperature	-20°C
Maximum Temperature	45°C

### Benefits

- 120V/277V Operation
- Architecturally Pleasing Die-Cast Design
- Surface Mounted Integral Design
- Meets or exceeds National Electrical Code and Life Safety Code Emergency Lighting
- Mounts Directly to Fixture for easy installation
- WET LOCATION For covered ceiling mount only.
- 20W Maximum Power Draw.
- Test switch

2022.09.20



ORDERING EXAMPLE: LCMPD7Q-EMA

FIXTURE	FINISH
LCMPD7Q-EMA	Blank :White*
	-B :Black
	-S :Silver

\* White finish is available in QuickShip