


IC Housing (2-Lamp) w/ Baffle w/ Glass Accent LFH8 SERIES - 8" ARCHITECTURAL HORIZONTAL CFL RECESSED LIGHTING

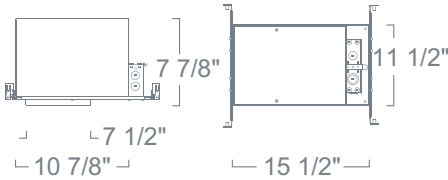

SPECIFICATION

Ceiling cut-out: 8 1/8"

Application: Architectural-grade recessed downlight housing for medium to high ceilings for commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing Frame: 16 gauge galvanized plaster ring with powder coat finish, six friction clips secure trim to housing for ceilings up to 2 1/4" thick. Triple slot bat-wing hanger brackets accommodate multiple bar hanger systems.

Mounting: Housing suitable for new construction installations only, Bat-Wing bar hanger brackets adjust vertically 3 1/4" for multiple ceiling types and accepts 1/2" EMT. 26" C-Channel Strut for T-bar ceilings and 27" adjustable linear hanger bars for plaster ceilings or wood/metal joists. Heavy duty 16-gauge, die-formed galvanized steel. Bar hangers optional.

Ballast: Electronic Class P 60Hz Ballast with Inherent thermal protection. For Double Twin Tube (DTT) or Triple Twin Tube Lamps (TTT). Sound A rated. Micro-Processor controlled. Min. starting temperature -10°C. Accessible from above or below the ceiling. Contact factory for detailed technical information on ballast specifications. Note: For dimming applications must use compatible dimmer switch. Consult specific ballast manufacturer for up-to-date compatibility list.

Socket Cap: Heavy-Duty steel socket enclosure with built-in ventilations. Die-cast aluminum fittings. Accepts compatible reflector trims.

Socket: Thermo-plastic socket UL Listed rated for high temperature and provides nickel plated contacts. Accepts 4-Pin lamps with electronic ballast selection.

Junction Box: 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation.

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Emergency Option: Double-wall IC housing must have ACCESS ABOVE CEILING per UL1598 Table 20.1.1 Item 2.7. Emergency back-up operates one lamp at 750 lumens for a minimum of 90 minutes in case of power outage. Unit is remotely mounted. It includes battery, charger and test switch with indicator light. Consult factory for 1300 lumen package.

Label: UL Listed, cETL Listed

Assembled in USA

FEATURE:




Application: Architectural-grade recessed downlight reflector for high ceilings for commercial and architectural installations. Reflector designed for minimal glare from lamp without sacrificing lumen output. Decorative glass accent brings style and elegance to any decor. Reduces lamp image while adding a subtle decorative element to architecture.

Mounting: Pre-punched key holes allow mounting of socket cap assembly for housing, with vertically adjustable socket cap. Reflector held in place with 6 steel pressure springs mounted on housing frame.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Label: UL Listed, cETL Listed

Assembled in USA

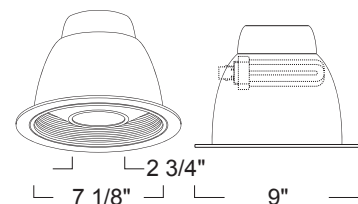

IC HOUSING LFH82 CFL (2) 26W Max

WATTAGE	BALLAST	OPTIONS
LFH8213IC : (2) 13W	UD : 0-10V Dimming (120V/277V)	Blank : None
LFH8218IC : (2) 18W	E : Electronic (120V)	-FS : Fuse
LFH8226IC : (2) 26W	E-27 : Electronic (277V)	
LFH8226ICA : (2) 26W IC-Airtight	D-27 : Dimming (277V)	
	UE : 120V/277V Electronic	

BAFFLE W/ GLASS ACCENT LR843 CFL (2) 42W TTT, (2) 26W DTT

BAFFLE / FLANGE FINISH	GLASS
LR843WWF : White Baffle/White Flange	-AM : Amber
LR843BWF : Black Baffle/White Flange	-BL : Blue
LR843COCOF : Copper Baffle/Copper Flange	-FR : Frosted
LR843MOMOF : Mocha Baffle/Mocha Flange	

Ordering example: LFH8218ICE/LR843WWF-FR