


TYPE CATALOG# PROJECT

Line Voltage Housing w/ Reflector Cone

MINI-ARC PHANTOM TRIMLESS

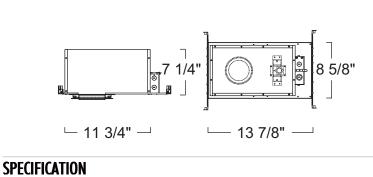

Ceiling cut-out: 5 7/8"



Application: Architectural-grade recessed "Trimless" downlight for low to medium height ceilings for residential commercial installations. Trimless design provides a clean unobstructed "zero-sight" line ceiling. Die-Cast aluminum plaster frame disc installed on housing for easy installation. A variety of trims compatible styles and finishes are available to achieve the proper décor and illumination.

Housing: Pre-wired housing with Die-Cast adjustment plate with pre-set ceiling thickness for easy installation in 1/2", 5/8", 3/4" and 1 inch ceilings. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with QuickLok mounting mechanism for an easy scratch free installation.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after the barbed stude to be a stude with the secure mount of the secure stude of the secure stude of the secure secure secure secure secure stude of the secure secur installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings

Socket: Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with 3/4", 1" and Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed


Assembled in USA

2016.8.29

Applications: Mini-Arc 'Trimless' trims provide a flat, unobstructed zero-sight line' view of the ceiling. Trims easily install into a die-cast aluminum adjustment plate that mounts onto the housing. This miniature Reflector trim is perfect for commercial and highend residential applications.

Accessories: Takes (1) 2" Media.

Label: UL Listed, cETL Listed



Ordering example: LHX4IN50/LRX421SW

LIGHT SOURCE LHX4IN50 :120V 50W GU10 MR16 LHX4IN50-27 :120V 50W GU10MR16 (277V)

LINE VOLTAGE HOUSING

LHX4IN

FINISH LRX421SW:Satin Reflector / White Ring

REFLECTOR CONE

LRX421

LRX421W :White Reflector / White Ring

12V/120V 50W MR16

