


Shallow IC Housing w/ Fully Adjustable Square Trim

LH1499 SERIES - 4" LOW VOLTAGE RECESSED LIGHTING

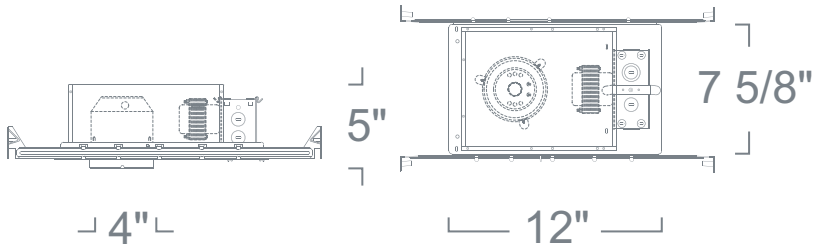

SPECIFICATION

Ceiling cut-out: 4 1/2"

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Transformer: Class H insulated magnetic transformer installed adjacent to Junction Box, bottom and top accessible. Thermally protected rated for 90° C

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 25 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (5) 3/4", (1) 1" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

FEATURE:



Application: Modern Square Aperture Trim is super adjustable and designed for retail, commercial and residential applications. Square trim ring can be rotated 360 degrees after installation.


Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Accessories: Takes (1) 2" Media.

Label: UL Listed, cETL Listed

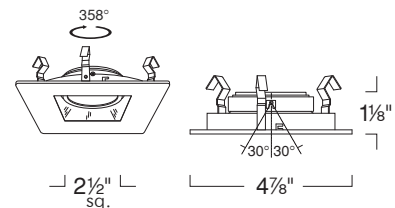

SHALLOW IC HOUSING

LSH1499IC 12V Out 37W Max MR16

RATING	WATTAGE	VOLTAGE
LSH1499ICA :IC-Airtight	Blank :37W	Blank :120V
LSH1499ICAE :IC Airtight Electronic	-27	:277V (Electronic*)

* Available with 120V/277V Magnetic Option, consult factory

FULLY ADJUSTABLE SQUARE TRIM

LRSQ1419J 12V 75W Max MR16 GU5.3/GU10

FINISH
LRSQ1419JBB :Black Reflector/Black Ring
LRSQ1419JBW :Black Reflector/White Ring
LRSQ1419JWW :White Reflector/White Ring

Ordering example: LSH1499ICA/LRSQ1419JWW