


## LTD35120 - 20W/1400LM LINEAR LED WALL WASH (3CCT/1NT) LED TRACK HEAD

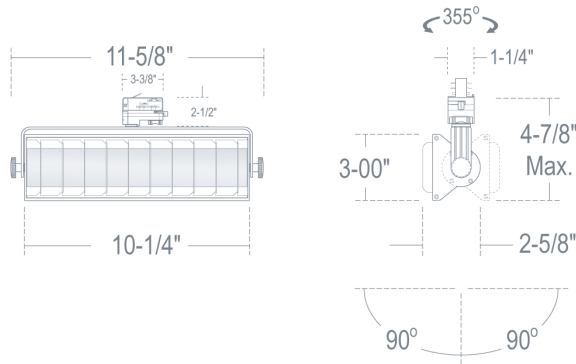

### SPECIFICATION

120V 20W LED

**Application:** High-output EcoTrack LED trackhead features a sleek, rectangular, low-profile design that combines soft yet powerful illumination with maximum energy efficiency. Perfect for applications in retail stores, boutiques and other areas where adjustable illumination is required and ceilings may be high or distances may be long. Functions both as a flood and as an even, scallop-free wall wash to illuminate signage, displays and merchandise. Provides up to 5 times the lumen output of traditional halogen lamp sources.

**Aiming:** Precision machined aiming mechanism allows 90° vertical adjustment.

**Connector:** Factory Installed specification grade 3-circuit 1-neutral track connector.

**Driver:** Electronic Direct Current U.L. recognized driver mounted away from LED Array for cool operation and end-of-life modularity. Comes standard with 120VAC input.

**Dimming:** Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450.

**Lumen Maintenance:** Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

**Thermal Management:** Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

**Color Temperature:** Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning of 2,700K, 3,500K & 4,000K. To order use "-T" Suffix followed by color temperature. Example 4000K= T40. Consult factory as extended lead times and minimum order quantities apply.

**Safety Labels:** ETL/cETL listed. Suitable for dry locations only.

**Warranty:** Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

**Finish:** Available in Black and White.

### COMPATIBILITY



LP30

SURFACE TRACK



LP30

RECESSED TRACK

Note: Wattage limitations on compatible items must be met.

#### LED Details:

#### 20W/1,400Lm Lumen Package

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 2x24W T5HO, 1x39W T5HO, 1x40W 2G11 BIAx

#### Benefit:

- High-Output LED Delivers 1,400+ Lumens
- Produces Even, Scallop-free Wall Wash
- Incandescent Dimming option
- Precision design ensures firm positioning

### FEATURE:



ORDERING EXAMPLE : LTD35120B-DLV

LTD35120

FINISH

LTD35120

B-DLV :Black

W-DLV :White